


DATASHEET

Version 2.3

ICEpower50ASX2

2x50W or 1x170W ICEpower Amplifier
with integrated ICEpower Supply

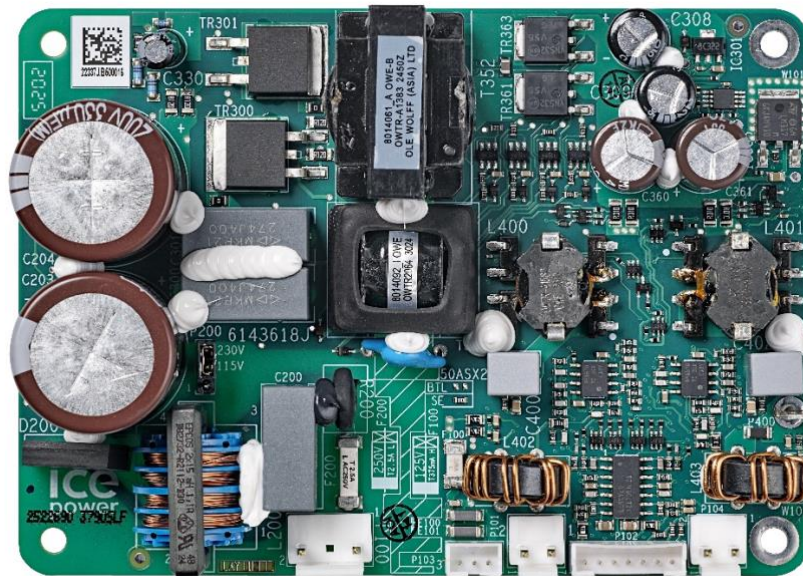

ICEpower50ASX2

Contents

General Description	3
• Fully integrated audio power solution	3
• Stereo or mono output versions available	3
• Rugged construction	3
• Thermal protection	3
• Over current protection	3
• Suitable for CE approved designs	3
• EMI conforms to: EN55013 EN55020 EN61000-3-2 EN61000-3-3 FCC part 15-B	3
• Safety conforms to: IEC/UL 62368 -1	3
Release Notes	5
Block Diagram	6
Connection Diagram	6
Absolute Maximum Ratings	9
Power Specifications	11
General Audio Specifications (SE-version)	12
General Audio Specifications (BTL-version)	13
Electrical Specifications	13
Timing Specifications	13
Disturbances on the Mains	14
Lightning	14
Mechanical Specifications	14
Typical Performance Characteristics	15
Dissipated Power vs. Output Power	20
Loading	21
Features	22
Protection Features	24
Input/Output Interface	25
Operational Timing Diagram	27
Thermal Design	27
Physical Dimensions	28
Drill Pattern	30
Safety Standards	31
ESD Warning	31
Packaging and Storing	32
Contact	33
Legal Notes	33

General Description

The ICEpower50ASX2 is a fully integrated, intelligent audio power conversion solution designed particularly for highly competitive consumer and professional audio products. The ICEpower50ASX2 is EMC and safety approved and the “black-box” completeness allows for fast design-in and minimized time to market. Key benefits include:

- State-of-the-art, high efficiency ICEpower amplification patent pending Conductor topology
- A power supply with selectable mains converter and
- A wide set of features for plug-and play implementation as active speakers and subwoofers, wireless speakers, musical instrument amplifiers and distributed audio

The ICEpower50ASX2 is protected against short-circuit, overload and provides a CE and FCC pre-approved design.



and EMI filtering to

The ICEpower50ASX2 is available in two variants with either stereo or mono output configuration. Combined with the auxiliary supply for powering external circuitry and the complete elimination of heat sinks and EMI shields; the ICEpower50ASX2 is the natural choice in any audio application that requires a compact, integrated power solution.

Key Specifications

- 170W @ 1% THD+N, 20Hz – 20kHz, 4Ω, BTL
- 2 x 47W @ 1% THD+N, 20Hz – 20kHz, 4Ω, SE (both channels driven)
- 88W (2Ω) + 22W (8Ω) @ 1% THD+N, 20Hz – 20kHz, SE (both channels driven with asymmetric load)
- Max output voltage / current: 20V_p / 12 A_p, 4Ω, SE
- Max output voltage / current: 37V_p / 12 A_p, 4Ω, BTL
- 122dBA dynamic range (BTL-version)
- 117dBA dynamic range (SE-version)
- THD+N = 0.0015% @ 1W (8Ω, 1kHz, SE)
- THD+N = 0.0015% @ 1W (8Ω, 1kHz, BTL)
- 81 % total efficiency @ 170W, 4Ω
- ±25V unregulated auxiliary power supply
- Selectable Mains 85-132V_{AC} & 170-264V_{AC}

Key Features

- Fully integrated audio power solution
- Stereo or mono output versions available
- Rugged construction
- Thermal protection
- Over current protection
- Suitable for CE approved designs
- EMI conforms to: EN55013
EN55020
EN61000-3-2
EN61000-3-3
FCC part 15-B
- Safety conforms to: IEC/UL 62368 -1

Module Overview & Comparative Table

Unless otherwise noted, all comparison table values represent typical characteristics.

Amplifier Section	Power (PSU & amp) & PSU Section
2x47 W (SE), 170 W (BTL), 1 % THD+N, 20 Hz – 20 kHz / 4 Ω	Continuous combined output power 43 W (SE), 50 W (BTL) 4 Ω , 100 W (BTL) 8 Ω , $T_a = 25^\circ\text{C}$, 230 V_{AC}
23 W (SE), 85 W (BTL), 1 % THD+N, 1 kHz / 8 Ω	Time of max rated output power: 120 s (230 V_{AC}) output 170 W, 4 Ω , $T_a = 25^\circ\text{C}$
Max output: voltage 20 V_p (SE), 37 V_p (BTL), current 12 A_p	Max operating ambient temperature 45 $^\circ\text{C}$
Min load impedance 3 Ω (SE & BTL)	Maximum total module efficiency 81 %
THD+N 0.0009 % (SE), 0.0004 % (BTL) @ 1 kHz, 10 W / 4 Ω	Vd_{aux} , P103 Pin 1, +25 V_{DC} , max 200 mA (output)
THD+N 0.0012 % (SE), 0.0006 % (BTL) @ 6.67 kHz, 10 W / 4 Ω	Vs_{aux} , P103 Pin 3, -25 V_{DC} , max 200 mA (output)
THD+N 0.0030 % (SE), 0.0006 % (BTL) @ 1 kHz, 10 W / 8 Ω	
Input sensitivity 1.34 V_{RMS} , 1.9 V_p (input voltage req. to reach rated power / clip level)	GND , P103 Pin 2
Voltage amplifier gain: 20.5 dB or 10.6x (SE) 27 dB or 22.4x (BTL)	
Output idle noise A-weighted 20 μV (SE & BTL)	
Bandwidth (-3 dB): upper 120 kHz (SE), 110 kHz (BTL) lower 1.5 Hz (SE & BTL)	
Dynamic range A-weighted 117 dB (SE), 122 dB (BTL)	
Conductor amplifier technology	
Available in 2-channel (SE) or 1-channel (BTL) version	Selectable mains input voltage 100-120 V_{AC} or 200-240 V_{AC} Remember to place mains setting voltage jumper correct!
	Module dimensions: L 110 mm / W 80 mm / H 35.5 mm
	Protection features: Short circuit, thermal, over-current, low mains
	Control interface: Enable (amplifier output)
	Readouts: Thermal, OC, Enable
See also ICEpower50ASX2 designer's manual	
For ordering: ICEpower50ASX2(BTL), part number 8003225 For ordering: ICEpower50ASX2(SE), part number 8002660	Certified by cURus
Cable kit available please contact sales@icepower.dk	EMC and safety pre-approved

Version	Date	Revised by	Changes
1.4	2014-11-13	LBH/SMK	Asymmetric load
1.5	2015-03-16	LBH/SMK	Minor drawing update
1.6	2017-09-07	LBH/DIT	Output voltage / current spec. added Safety and EMI standards updated Address updated Legal Notes updated
1.7	2018-10-04	LBH/DIT	Absolute Maximum Ratings – Mains Input Section and Thermal Section updated
1.8	2020-05-05	LBH/NKK	Minor update in Safety Standards
1.9	2023-04-24	LKA	Updated safety-reference on page 3 and the contents-page
2.0	2024-10-08	RSM/PBM	New amplifier topology prototype version
2.1	2025-07-17	RSM/PBM	New amplifier topology released version
2.2	2025-12-18	RSM/PBM	Figure 14 updated
2.3	2026-02-26	LBH/PEJ	Module overview & comparative table added

Block Diagram


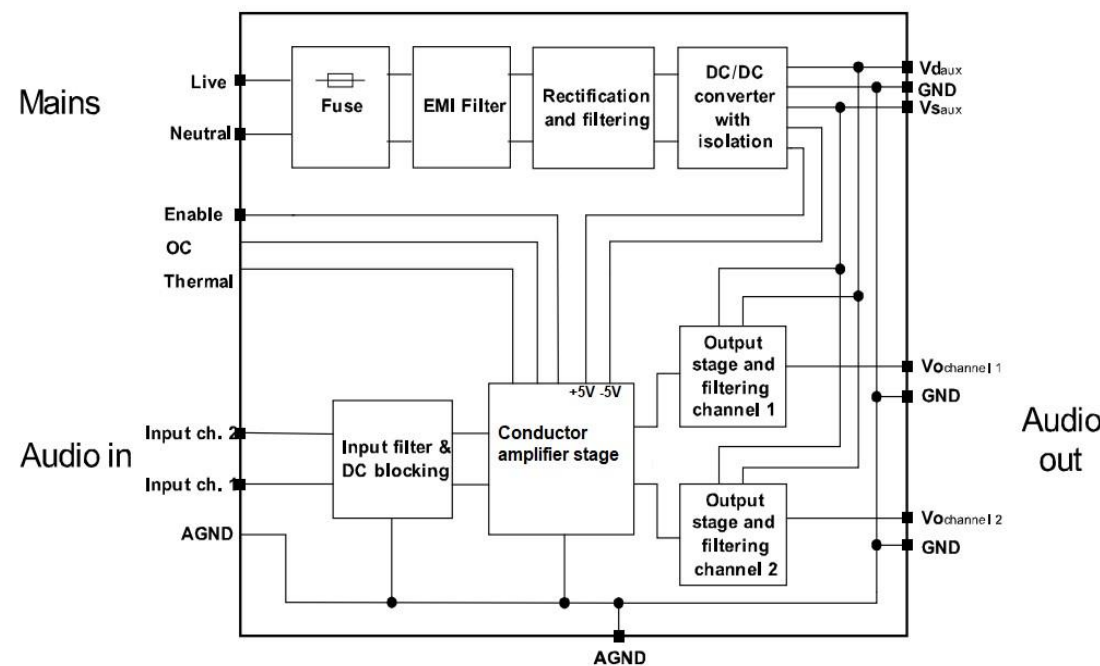


Figure 1: ICEpower50ASX2 block diagram

Connection Diagram

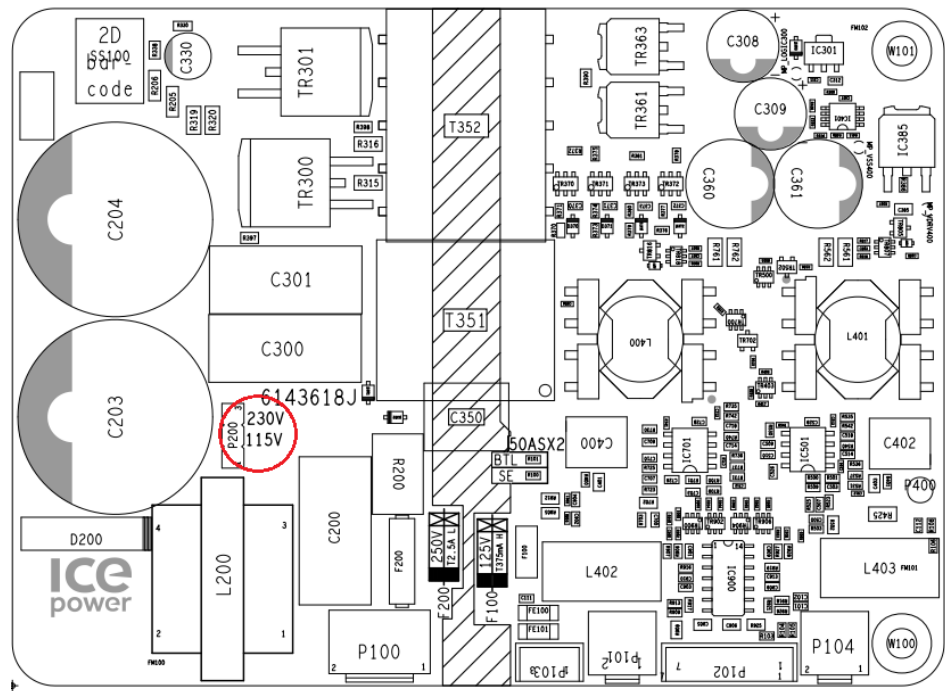

The connector interface of the ICEpower50ASX2 modules has five industry standard connectors selected for long-term reliability.

AC Header Specifications (P100)

Type: JST B2P3-VH			
PIN	Function	Description	Type
1	Live	Live AC	Input
2	Neutral	Neutral AC	Input

Table 1: AC connector specifications

Speaker Header Specifications (P101)*

Type: JST B2P-VH			
PIN	Function	Description	Type
1	Vo+	Amplifier output channel 1	Output
2	GND	GND _{channel1}	GND

Table 2: Speaker connector specifications

*P101 is not mounted on the BTL-version.

Speaker Header Specifications (P104)

Type: JST B2P-VH			
PIN	Function	Description	Type
1	Vo+	Amplifier output channel 2	Output
2	GND in SE (Vo- in BTL)	GND _{channel2} *	GND*

Table 3: Speaker connector specifications

* This pin is Vo+ (hot) in BTL version and GND in SE version

Signal Header Specifications (P102)

Type: JST B7B-PH-K-S			
PIN	Function	Description	Type
7	Vin channel 1	Input signal channel 1	input
6	GND	Ground terminal for the signal section.	GND
5	GND	Ground terminal for the signal section.	GND
4	Vin channel 2	Input signal channel 2	Input
3	Thermal	Thermal monitoring pin	Output*
2	OC	Monitor pin amplifier over current	Output*
1	Enable	Amplifier enable	Input/Output*

Table 4: Signal connector specifications

* See "Features" section on page 21

Auxiliary Supply Header Specifications (P103)

Type: JST B3B-PH-K-S			
PIN	Function	Description	Type
1	Vd _{aux}	Positive unregulated auxiliary supply (typical +25V)	Output
2	GND	Ground terminal for the auxiliary section.	GND
3	Vs _{aux}	Negative unregulated auxiliary supply (typical -25V)	Output

Table 5: Auxiliary supply header specifications

Absolute Maximum Ratings

Absolute maximum ratings indicate limits beyond which damage may occur.

Mains Input Section

115V mains setting

Symbol	Parameter	Value	Units
AC_{max}	Maximum off-line voltage (Safety test)	132 ^{1b)}	V_{AC}
AC_{min}	Minimum off-line voltage (Safety test)	85 ^{1a,1b)}	V_{AC}
F	Mains frequency range 85V _{AC} - 132V _{AC}	45 – 65	Hz

Table 6: Absolute maximum ratings, mains input section - 115V setting

230V mains setting

Symbol	Parameter	Value	Units
AC_{max}	Maximum off-line voltage (Safety test)	264 ^{1c)}	V_{AC}
AC_{min}	Minimum off-line voltage (Safety test)	170 ^{1a,1c)}	V_{AC}
F	Mains frequency range 170V _{AC} - 264V _{AC}	45 – 65	Hz

Table 7: Absolute maximum ratings, mains input section - 230V setting

1.a) The ICEpower50ASX2 will operate at lower levels but the output power will be reduced. If the off-line voltage is too low, the ICEpower50ASX2 switches off.

1.b) 115 V mains setting: The maximum operating/usage mains voltage is 120Vac and the minimum operating/usage mains voltage is 100Vac.

1.c) 230 V mains setting: The maximum operating/usage mains voltage is 240Vac and the minimum operating/usage mains voltage is 200Vac.

Auxiliary Supply

Symbol	Parameter	Value	Unit
I_{Vd}	Maximum current draw from Vd (+25V) ²⁾	200	mA
I_{Vs}	Maximum current draw from Vs (-25V) ²⁾	-200	mA

Table 8: Absolute maximum ratings, auxiliary supply

2) If the auxiliary supply on the ICEpower50ASX2 is used with a capacitive load please remember to read the section "Capacitive Loading of the AUX Supply" in the ICEpower50ASX2 designer's manual.

Input Section

Symbol	Parameter	Value	Unit
Vin channel 1, Vin channel 2	Maximum voltage range on pin	±3.3	V_p

Table 9: Absolute maximum ratings, input section

Output Section

Symbol	Parameter	Value	Units
R_{load}	Minimum load, BTL	3	Ω
R_{load}	Minimum load, SE	2	Ω
$I_{out}^{(3)}$	Maximum current draw from amplifier output	12	A _p
C_L	Maximal pure capacitive loading	470	nF

Table 10: Absolute maximum ratings, output section.

3) The over-current protection will act to protect the amplifier. (See "Protection features")

Thermal Section

Symbol	Parameter	Value	Unit
T_a	Max. operating ambient temperature (safety conditions tested)	45	°C

Table 11: Absolute maximum ratings, thermal section

Power Specifications

Unless otherwise specified. $T_a=25^{\circ}\text{C}$, $f=1\text{kHz}$, $R_L=4\Omega$, 230V mains

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{Pmax}	Time of maximum rated output power	170W out. No preheating.	-	120	-	s
P_T	Continuous output power ⁴⁾ without thermal shutdown. (SE, 4Ω) Both channels driven	Thermal stab. @ $T_a = 25^{\circ}\text{C}$.	-	43	-	W
P_T	Continuous output power ⁴⁾ without thermal shutdown. (SE, 8Ω) Both channels driven	Thermal stab. @ $T_a = 25^{\circ}\text{C}$.	-	30	-	W
P_T	Continuous output power ⁴⁾ without thermal shutdown. (BTL, 4Ω)	Thermal stab. @ $T_a = 25^{\circ}\text{C}$.	-	50	-	W
P_T	Continuous output power ⁴⁾ without thermal shutdown. (BTL, 8Ω)	Thermal stab. @ $T_a = 25^{\circ}\text{C}$.	-	100	-	W
P_{SMPS}	Quiescent power consumption (– amplifier disabled)	Enable pin low	-	5.8	-	W
P_q	Quiescent power consumption (amplifier enabled)	$P_o = 0\text{W}$	-	7.7	-	W
η	Total power efficiency	$P_o = 100\text{W}$ $P_o = 170\text{W}$	- -	80 81	- -	%
$V_{d_{aux}}$, $V_{s_{aux}}$	Nominal DC voltage	Any combination of mains voltage and output power within specified ranges.	± 16	± 25	± 31	V

Table 12: Power specifications

4) The module is mounted vertically in free air.

General Audio Specifications (SE-version)

Unless otherwise specified, $f=1\text{kHz}$, $P_O=1\text{W}$, $T_a=25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
P_O	Output power @ 1%THD+N 20Hz < f < 20kHz, both channels driven. (AES17 measurement filter) ⁵⁾	$R_L = 4\Omega$ 230V _{ac} / 50Hz, 115V _{ac} / 50Hz	- -	47 45	- -	W
P_O	Output power @ 10%THD+N 20Hz < f < 20kHz, both channels driven. (AES17 measurement filter) ⁵⁾	$R_L = 4\Omega$ 230V _{ac} / 50Hz, 115V _{ac} / 50Hz	- -	57 54	- -	W
P_O	Output power @ 1%THD+N 20Hz < f < 20kHz, both channels driven, First channel $R_L = 2.7\Omega$, Second channel $R_L = 8\Omega$ (AES17 measurement filter) ⁵⁾	230V _{ac} / 50Hz, $R_L = 2.7\Omega$ $R_L = 8\Omega$ 115V _{ac} / 50Hz, $R_L = 2.7\Omega$ $R_L = 8\Omega$	- - - -	69 23 66 22	- - - -	W
P_O	Output power @ 1%THD+N 20Hz < f < 20kHz, both channels driven, First channel $R_L = 2\Omega$, Second channel $R_L = 8\Omega$ (AES17 measurement filter) ⁵⁾	230V _{ac} / 50Hz, $R_L = 2\Omega$ $R_L = 8\Omega$ 115V _{ac} / 50Hz, $R_L = 2\Omega$ $R_L = 8\Omega$	- - - -	88 22 82 20	- - - -	W
P_O	Output power @ 1%THD+N 20Hz < f < 20kHz, one channel driven. (AES17 measurement filter) ⁵⁾	$R_L = 4\Omega$ 230V _{ac} / 50Hz, 115V _{ac} / 50Hz	- -	50 50	- -	W
P_O	Output power @ 1%THD+N 20Hz < f < 20kHz, one channel driven. (AES17 measurement filter) ⁶⁾	$R_L = 2.7\Omega$ 230V _{ac} / 50Hz, 115V _{ac} / 50Hz	- -	74 70	- -	W
P_O	Output power @ 1%THD+N 20Hz < f < 20kHz, one channel driven. (AES17 measurement filter) ⁶⁾	$R_L = 2\Omega$ 230V _{ac} / 50Hz, 115V _{ac} / 50Hz	- -	93 88	- -	W
V_{O-max}	Max output voltage	$R_L = 4\Omega$	-	20	-	V _p
I_{O-max}	Max output current	(output current limited)	-	12	-	A _p
THD+N	THD+N (4 Ω , AES17 measurement filter) ⁶⁾	f = 100Hz, $P_O=1\text{W}$	-	0.002	0.01	%
$V_{N,O}$	Output referenced idle noise	A-weighted	10	20	70	μV
A_V	Nominal Voltage Gain	f = 1 kHz	20	20.5	21.5	dB
f	Frequency response	20Hz - 20kHz, All loads	-	± 0.1	± 0.5	dB
f_u	Upper bandwidth limit (SE) (-3dB)	$R_L = 8\Omega$ $R_L = 4\Omega$	- -	120 110	- -	kHz
f_l	Lower bandwidth limit (-3dB)	$R_L = \text{All loads}$	-	1.5	-	Hz
Z_o	Abs. output impedance	f = 1kHz	-	12	25	m Ω
Z_L	Load impedance range		3	4	∞	Ω
D	Dynamic range	A-weighted (50W, 4 Ω)	-	117	-	dB

Table 13: General audio specifications, SE mode

5) An Audio Precision AES17 20 kHz 7th order measurement filter is used for measurements. The frequency 6.67 kHz corresponds to the worst-case situation where both 2nd and 3rd harmonics are within the audio band.

General Audio Specifications (BTL-version)

Unless otherwise specified, $f=1\text{kHz}$, $P_O=1\text{W}$, $T_a=25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
P_O	Output power @ 1%THD+N 20Hz < f < 20kHz (AES17 measurement filter) ⁶⁾	$R_L = 4\Omega$ 230V _{ac} / 50Hz, 115V _{ac} / 50Hz	- -	170 150	- -	W
P_O	Output power @ 10%THD+N 20Hz < f < 20kHz (AES17 measurement filter) ⁶⁾	$R_L = 4\Omega$ 230V _{ac} / 50Hz, 115V _{ac} / 50Hz	- -	220 180	- -	W
V_{O-max}	Max output voltage	$R_L = 4\Omega$	-	37	-	V _p
I_{O-max}	Max output current	(output current limited)	-	12	-	A _p
THD+N	THD+N in 4Ω (AES17 measurement filter) ⁶⁾	f = 100Hz, $P_O=1\text{W}$	-	0.002	0.005	%
$V_{N,O}$	Output referenced idle noise	A-weighted 20Hz < f < 20kHz	15	20	70	μV
A_V	Nominal Voltage Gain	f = 1 kHz	26	27	28	dB
f	Frequency response	20Hz - 20kHz, All loads	-	±0.2	±0.6	dB
f_u	Upper bandwidth limit (BTL) (-3dB)	$R_L = 8\Omega$ $R_L = 4\Omega$	- -	110 100	- -	kHz
f_l	Lower bandwidth limit (-3dB)	$R_L = \text{All loads}$	-	1.5	-	Hz
Z_o	Abs. output impedance	f = 1kHz	-	25	30	mΩ
Z_L	Load impedance range		3	4	∞	Ω
D	Dynamic range	A-weighted at 170W@4Ω	-	122	-	dB

Table 14: General audio specifications, BTL mode

⁶⁾ An Audio Precision AES17 20 kHz 7th order measurement filter is used for measurements. The frequency 6.67 kHz corresponds to the worst-case situation where both 2nd and 3rd harmonics are within the audio band.

Electrical Specifications

Unless otherwise specified, $T_a=25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_o	Idle switching frequency	Idle	380	420	470	kHz
f_s	Switching frequency range (amplifier)	Idle to full scale variation	150	-	500	kHz
f_{smips}	Switching frequency (power supply)		-	100	-	kHz

Table 15: Electrical specifications

Timing Specifications

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_{acd}	Power supply start up delay. (nominal mains)	Time from reaching AC _{min} to all power supplies are good and amplifier is active.	-	700	1000	ms

Table 16: Timing specifications

Disturbances on the Mains

The signal on the mains connection is often very noisy and large surge voltages are present. The ICEpower50ASX2 is equipped with mains filtering to suppress surges and noise.

Lightning

To avoid damage of the ICEpower50ASX2 in case of surges caused by lightning, special care and component selection have resulted in capability of withstanding surges up to 5.5kV.

Mechanical Specifications

During development the ICEpower50ASX2 has passed tough mechanical tests to ensure high reliability.

Test	Acceleration	Amount
Unpowered tests: The unit is powered after the test to verify functionality.		
Random vibration	2g _{RMS}	3x20min
Bump	10g/16ms, 2-4 Hz	1000 bumps in each of 6 directions ⁷⁾
Shock	70g/12ms	3 shocks in each of 6 directions ⁷⁾
Powered tests: The unit is tested with power applied.		
Sinusoidal vibrations	2.5mm, 5-10Hz 1g, 10-100Hz	2 hours in each of 3 directions ⁷⁾
Random vibrations	0.01g, 10-20Hz 0.7g _{RMS} -3dB/oct, 20-150Hz	2 hours in each of 3 directions ⁷⁾

Table 17: Mechanical tests

⁷⁾ 6 directions: (up, down, left, right forward and backward). 3 directions: (up and down, left and right, forward and backward)

Typical Performance Characteristics

Frequency Response (SE-version)

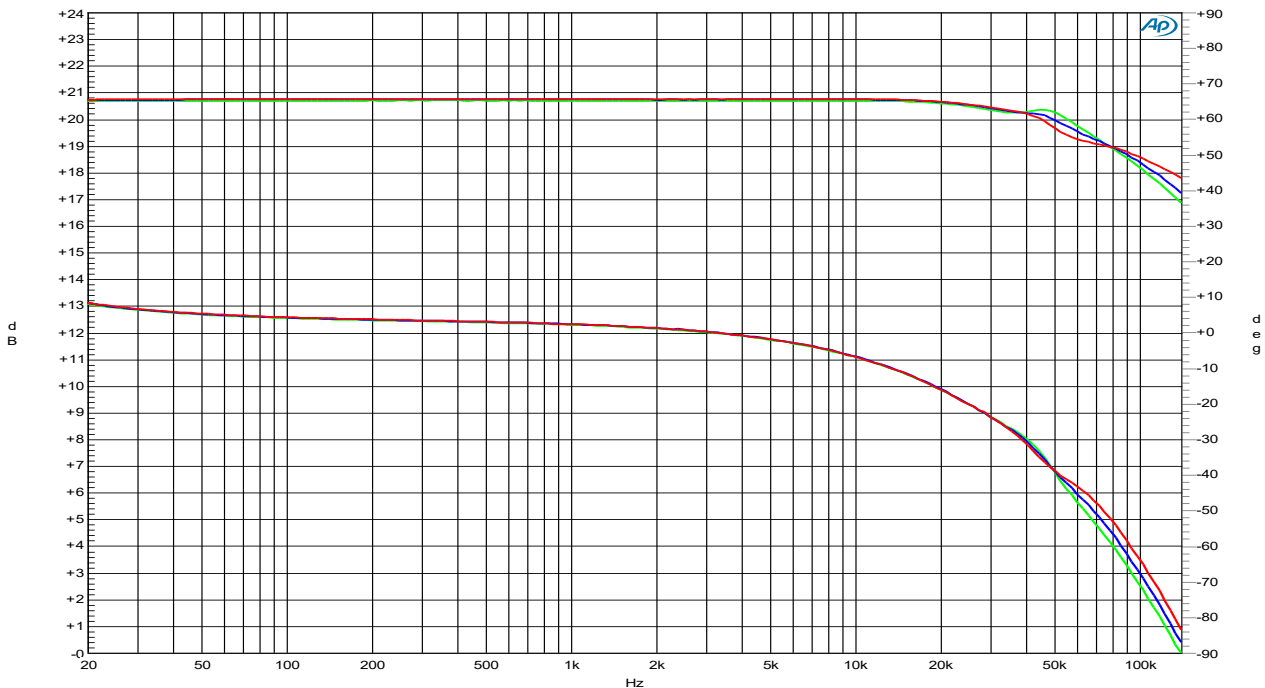


Figure 3: Frequency response in 4Ω (green), 8Ω (blue) and open load (red). Top – amplitude. Bottom – phase.

Frequency Response (BTL-version)

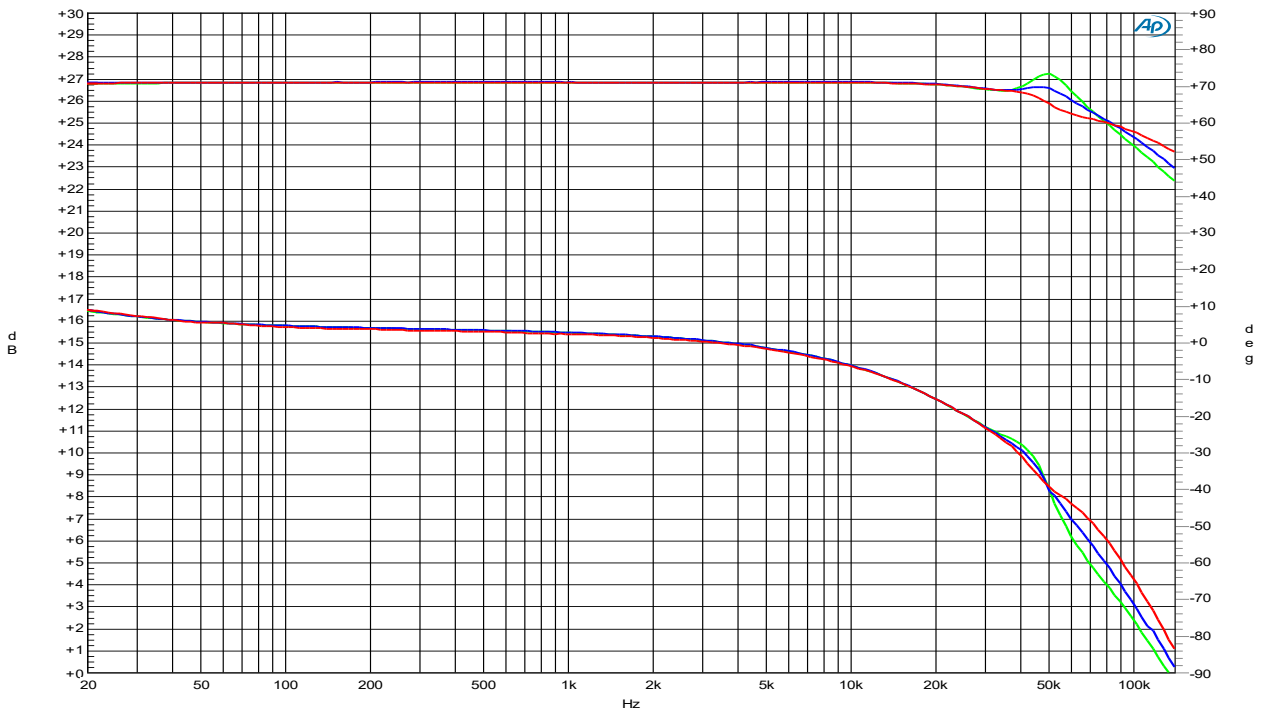
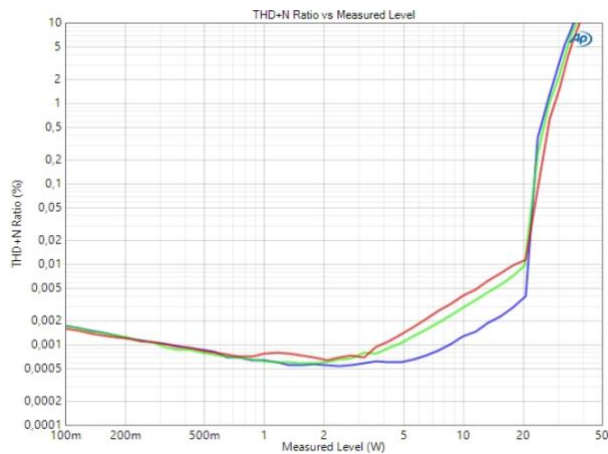
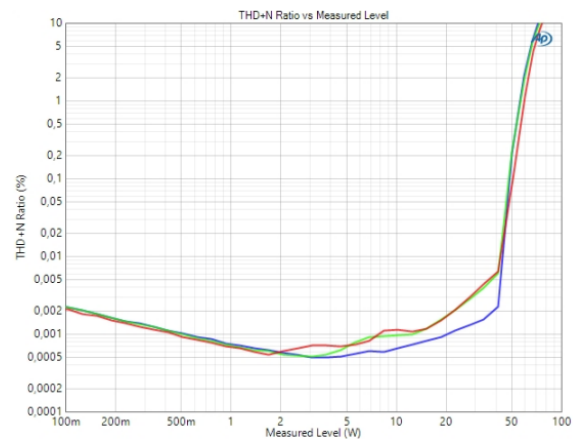
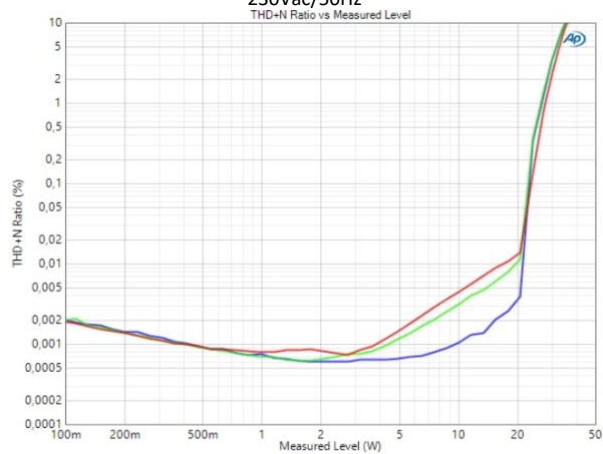


Figure 4: Frequency response in 4Ω (green), 8Ω (blue) and open load (red). Top – amplitude. Bottom – phase.


Harmonic Distortion & Noise (SE-version)

THD+N vs. Po at 100Hz(Blue), 1kHz(Green) and 6.67kHz(Red) ⁸⁾ (8Ω).

230Vac/50Hz

THD+N vs. Po at 100Hz(Blue), 1kHz(Green) and 6.67kHz(Red) ⁸⁾ (4Ω),
230Vac/50HzTHD+N vs. Po at 100Hz(Blue), 1kHz(Green) and 6.67kHz(Red) ⁸⁾ (8Ω),

115Vac/50Hz

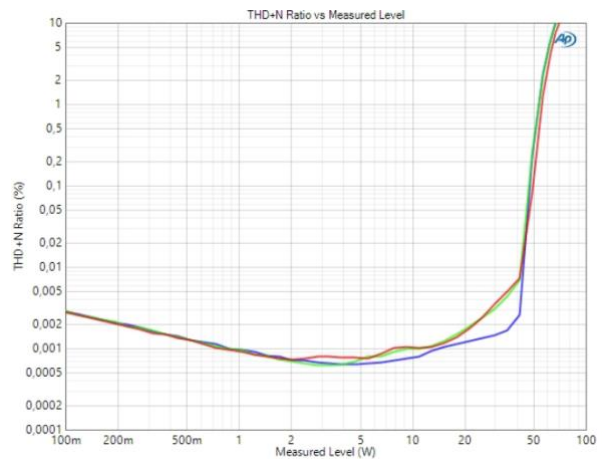THD+N vs. Po at 100Hz(Blue), 1kHz(Green) and 6.67kHz(Red) ⁸⁾ (4Ω),

115Vac/50Hz

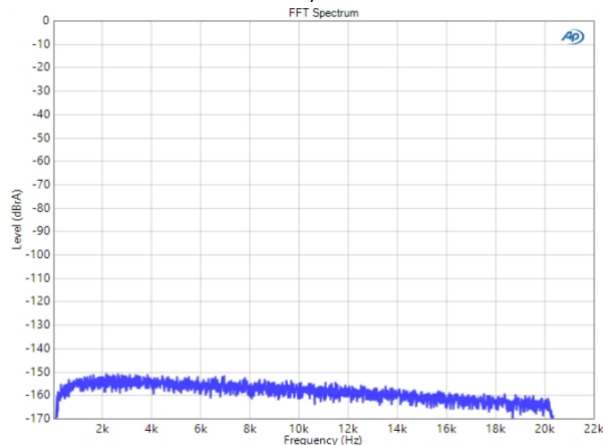
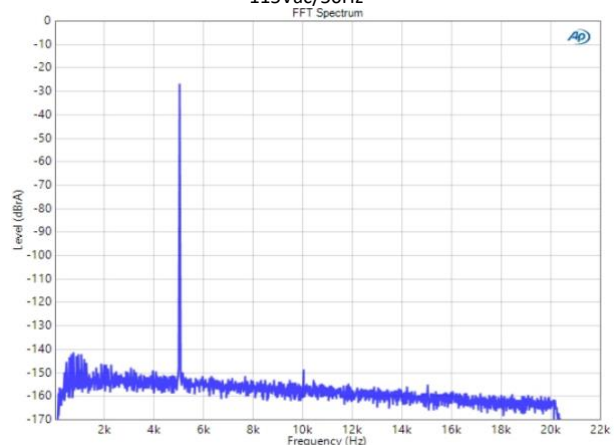
Idle noise (16K FFT). Residual = 25μV(A).
(Relative to 50W into 4 ohm)f = 5kHz. Po = 100mW. 4Ω loading.
(Relative to 50W into 4 ohm)

Figure 5: Total harmonic distortion & noise (SE).

⁸⁾ An Audio Precision AES17 20 kHz 7th order measurement filter is used for measurements. The frequency 6.67 kHz corresponds to the worst-case situation where both 2nd and 3rd harmonics are within the audio band.

Harmonic Distortion & Noise (BTL-mode)

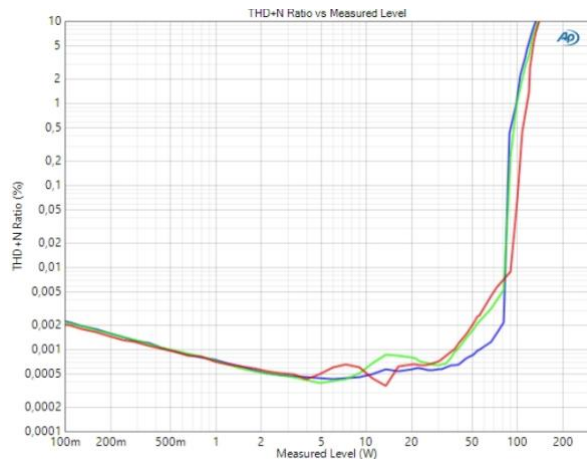
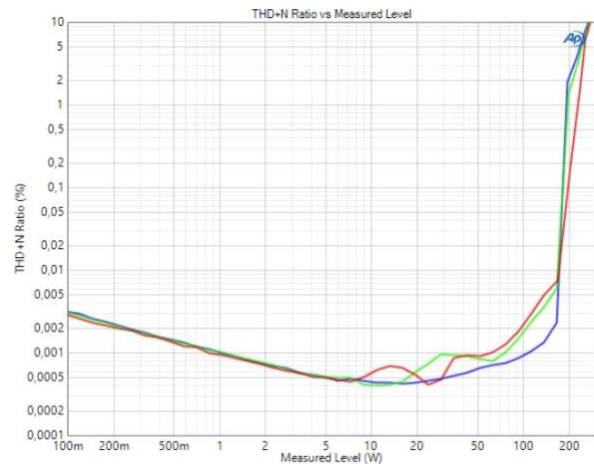
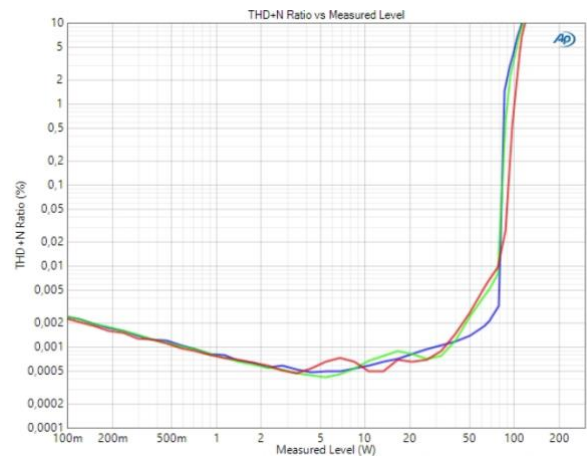
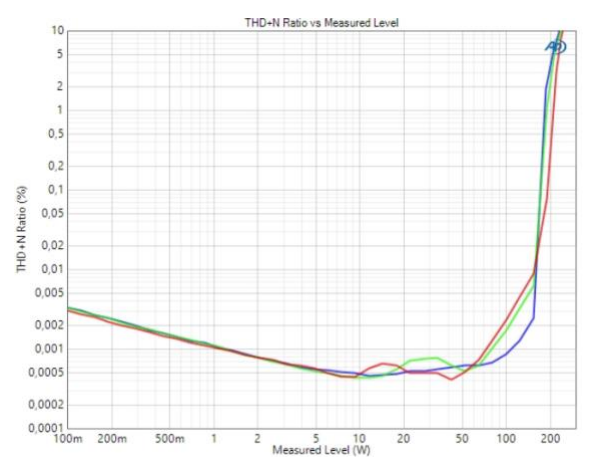
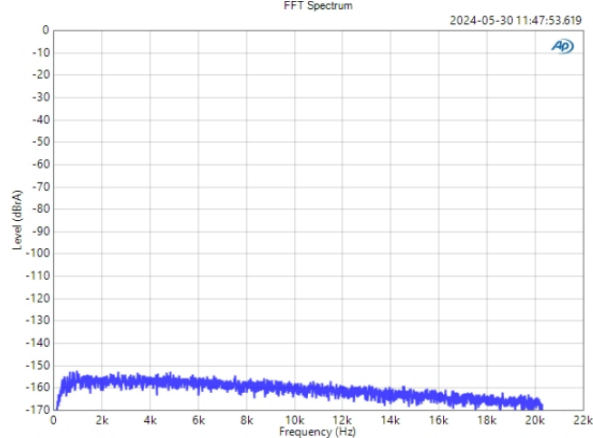
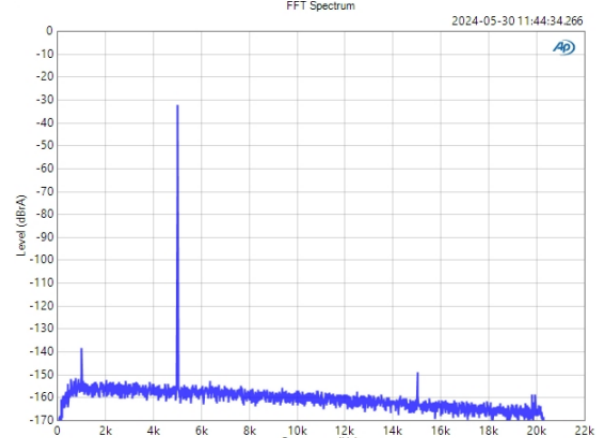
THD+N vs. Po at 100Hz(Blue), 1kHz(Green) and 6.67kHz(Red)⁹⁾ (8Ω),
230Vac/50HzTHD+N vs. Po at 100Hz(Blue), 1kHz(Green) and 6.67kHz(Red)⁹⁾ (4Ω),
230Vac/50HzTHD+N vs. Po at 100Hz(Blue), 1kHz(Green) and 6.67kHz(Red)⁹⁾ (8Ω),
115Vac/50HzTHD+N vs. Po at 100Hz(Blue), 1kHz(Green) and 6.67kHz(Red)⁹⁾ (4Ω),
115Vac/50HzIdle noise (16K FFT). Residual = 25μV(A).
(Relative to 170W into 4 ohm)f = 5kHz. Po = 100mW. 4Ω loading.
(Relative to 170W into 4 ohm)

Figure 6: Total harmonic distortion & noise (BTL).

9) An Audio Precision AES17 20 kHz 7th order measurement filter is used for measurements. The frequency 6.67 kHz corresponds to the worst-case situation where both 2nd and 3rd harmonics are within the audio band.

Power vs. Frequency

The maximum allowable short-term output power of the ICEpower125ASX2 is frequency-dependant due to limitations in the output filter capacitor which will be subject to higher current and losses at high frequencies. The short-term output power is defined as the maximum undistorted (THD+N < 1%) output power until thermal shutdown occurs. The maximum Full Power Bandwidth is 20 kHz. Above this frequency, sustained operation at high output voltages may cause damage to the module.

Note that this limitation will never cause any problems when the amplifier is fed a music signal at the input, but the limit must be taken into consideration when the amplifier is tested under laboratory conditions using sine waves or noise signals.

Output Impedance

The output impedance is measured by feeding $1A_{RMS}$ into the output of the amplifier and measuring the voltage on the output. The voltage then corresponds to the output impedance. The output impedance is measured directly on the terminals on the PCB.

The figure below shows the output impedance from 100Hz – 20kHz for the SE-version.

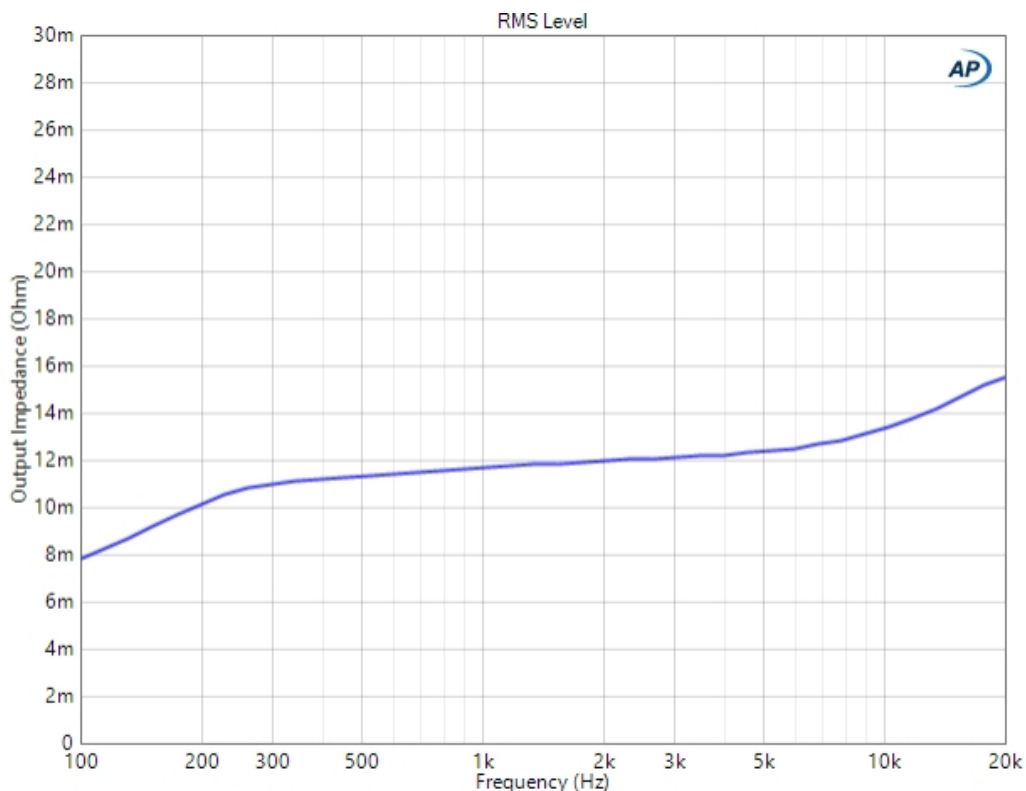


Figure 7: Measured voltage at output terminals while feeding $1A_{RMS}$ into the output of the amplifier at PCB.

The figure below shows the output impedance from 100Hz – 20kHz for the BTL-version.

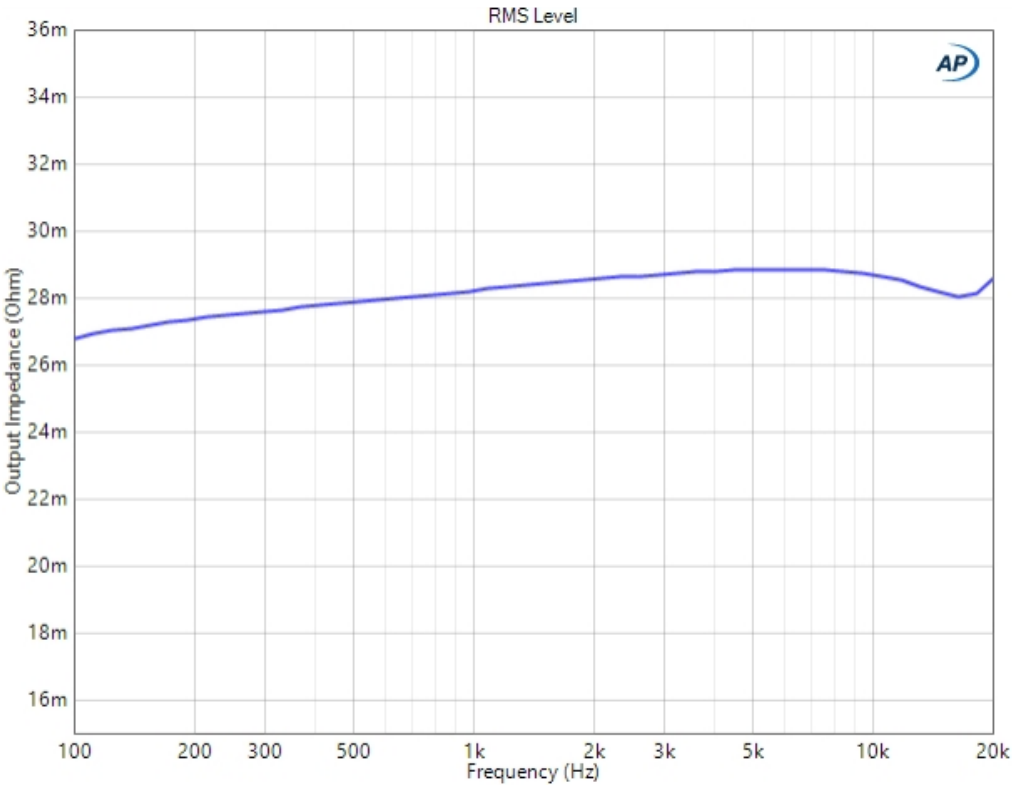


Figure 8: Measured voltage at output terminals while feeding 1Arms into the output of the amplifier at PCB

Dissipated Power vs. Output Power

SE-version

Mains Voltage V_{IN} : 115V/50Hz

SE-version	Load impedance [Ω]	Rated power [W]	Line power [W]	Output power (both channels) [W]	Dissipated power [W]
Idle			6.6		6.6
1/8 rated power (pink noise)	4	45	21	2 x 6	9
1/8 rated power (pink noise)	8	25	13	2 x 3	7
Continuous output power	4	43	104	2 x 43	18
Continuous output power	8	25	60	2 x 25	10

Mains Voltage V_{IN} : 230V/50Hz

SE-version	Load impedance [Ω]	Rated power [W]	Line power [W]	Output power (both channels) [W]	Dissipated power [W]
Idle			6.6		6.6
1/8 rated power (pink noise)	4	47	21	2 x 6	9
1/8 rated power (pink noise)	8	27	13	2 x 3	7
Continuous output power	4	43	105	2 x 43	19
Continuous output power	8	27	63	2 x 27	9

Table 18: Dissipated power vs. Output power (SE)

BTL Power Dissipation

Mains Voltage V_{IN} : 115V/50Hz

BTL-version	Load impedance [Ω]	Rated power [W]	Line power [W]	Output power [W]	Dissipated power [W]
Idle			7.7		7.7
1/8 rated power (pink noise)	4	150	30	19	11
1/8 rated power (pink noise)	8	95	20	12	8
Continuous output power	4	50	66	50	16
Continuous output power	8	95	113	95	18

Mains Voltage V_{IN} : 230V/50Hz

BTL-version	Load impedance [Ω]	Rated power [W]	Line power [W]	Output power [W]	Dissipated power [W]
Idle			7.7		7.7
1/8 rated power (pink noise)	4	170	32	21	11
1/8 rated power (pink noise)	8	100	21	13	8
Continuous output power	4	50	66	50	16
Continuous output power	8	100	116	100	16

Table 19: Dissipated power vs. Output power (BTL)

Loading

With its low output impedance, the ICEpower50ASX2 is designed to be unaffected by loudspeaker loading characteristics. However, care should be taken with *purely* capacitive loads.

Traditionally, amplifiers have been tested extensively in laboratories with purely capacitive loads. This was done to test the amplifier's stability and performance, but it does not relate to any normal speaker load as even electrostatic speakers do not present a purely capacitive load to the amplifier but include a resistive part as well. The maximum purely capacitive load allowed is 470nF.

Features

The ICEpower50ASX2 has a number of useful features as described below.

Overcurrent Monitor Pin

Figure 9 shows the internal circuit of the OC pin interface. This pin is high (+5V) under normal conditions. If a short circuit is detected on the speaker output terminals, the pin is pulled low (0V).

This pin is only an output.

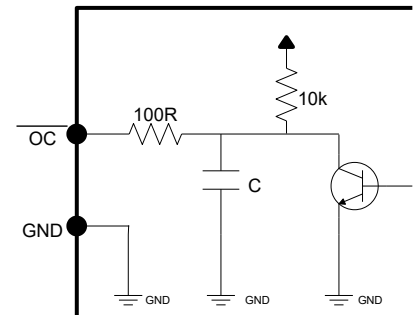


Figure 9: Over Current monitor pin interface

Thermal Monitor Pin

Figure 10 shows the internal circuit of the thermal pin interface. This pin is high (+5V) under normal conditions. If the amplifier temperature becomes too high, the pin is pulled low (0V). This can happen if the continuous power drawn from the amplifier exceeds the limits listed on p. 10. This pin is only an output.

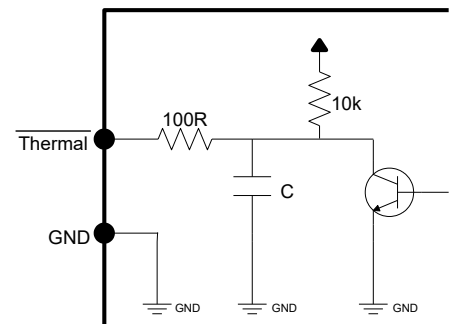


Figure 10: Thermal monitor pin interface

Enable Pin

The enable pin can enable/disable the amplifier. If the pin is left unconnected, then the level is high (+5V) and the amplifier is enabled. If the pin is pulled low (0V) externally, the amplifier will be disabled.

The enable pin will also be pulled low by the internal protection circuitry if the amplifier temperature becomes too high or a mains under-voltage is detected. This pin is bidirectional.

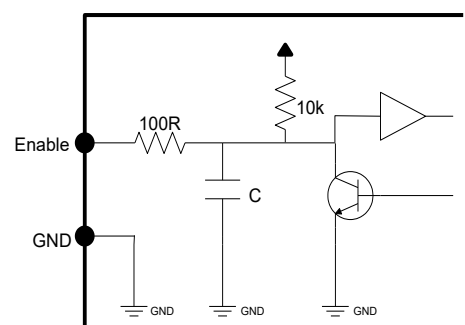


Figure 11: Enable pin interface

Auxiliary Power Supply

The auxiliary supply can be used to power an external circuit such as a preamplifier or an equalizer/crossover. Remember that this supply is unregulated.

When using this AUX supply, please remember to read the sections “Shielding and Grounding of Audio Signals” and “Capacitive Loading of the Aux Supply” in the ICEpower50ASX designer’s manual.

NOTE:

The Vd and Vs outputs are fused. Even brief overload or short circuit will blow the fuses!

To maintain long term power handling and the effects of inrush current, the fuses on the module are 375mA types. To ensure no unexpected burning of the fuse, the maximum output current drawn from the aux supply should not exceed 200mA.

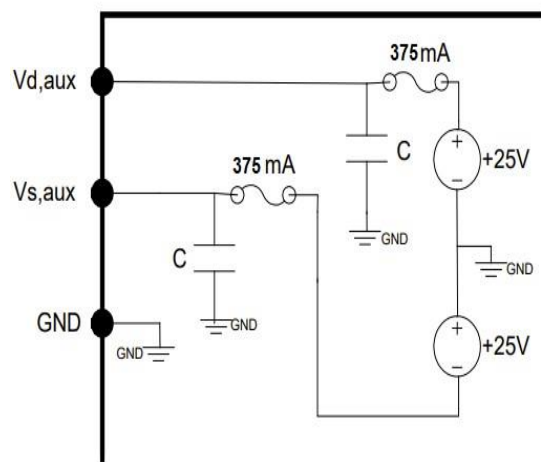


Figure 12: Auxiliary supply equivalent diagram

Protection Features

The ICEpower50ASX2 is equipped with several protection features for surviving overload without damage. The block diagram below illustrates the different protection features.

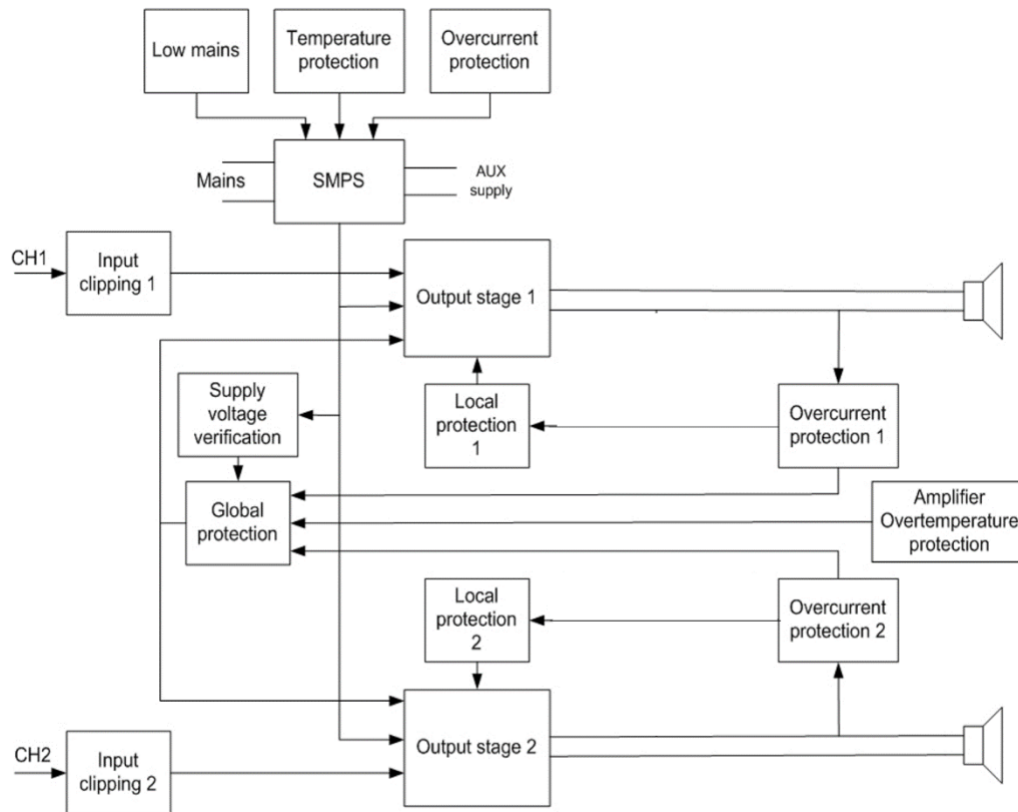


Figure 13: Protection schematic

Power Supply Protection

The power supply of the ICEpower50ASX has two protection circuits; overtemperature and overcurrent.

The temperature protection will be activated if the absolute temperature of the circuit is too high. This can be caused by high ambient temperature, high load (amplifier and AUX supply) for a long time or a combination of these two parameters.

The overcurrent protection will be activated if the output current to amplifier and AUX is too large. Please remember that the AUX supply is protected by fuses.

If one of these protection features is triggered, the power supply either limits its output power or shuts down. In case of a shutdown, the power supply will rapidly try to restart if the circuit's temperature is OK.

Amplifier Local Protection

The ICEpower50ASX2 has a local protection circuit for each of the two audio channels. This local protection handles over current protection. If this protection feature becomes active on one channel, it will influence on the channel where the error occurred and then it affects the entire module.

Zobel/saturation protection is no longer needed because the amplifier cannot saturate, and it will run in over current limit until over temperature protection occurs.

Amplifier Global Protection

There are two global protection features in the 50ASX2 amplifier; an over temperature protection and an overcurrent protection.

The over temperature protection will only occur if the P_{RMS} is greater than the specified Continuous Output Power. In normal use, the amplifier will not shut down if properly mounted.

The overcurrent detection circuit is a secondary self-oscillating loop which accurately measures and controls the current in the output stage. Over current limitation condition will be allowed until over temperature protection occurs. When one channel gets overheated the entire module stops. Thus, it gives global protection. The current limit is set to 12Ap.

Input/Output Interface

Input Stage

The single ended input buffer has an anti-aliasing filtering and a DC capacitor. The input impedance of the signal input section is minimum $8k\Omega$ over the audio bandwidth, which is an acceptable loading condition for pre-amps, active crossover outputs etc.

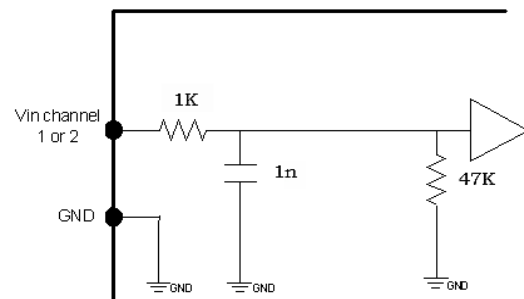


Figure 14: Single ended input buffer

BTL module setup

When using the BTL module, the wiring diagram on fig. 15 should be followed. Note that it is the channel 2 speaker terminal which is used on the BTL module (the channel 1 terminal is not mounted on the board).

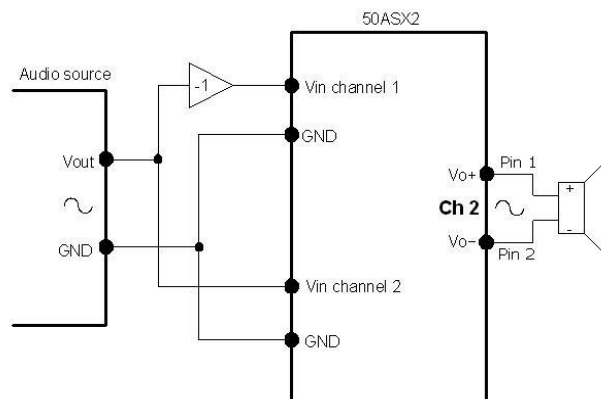


Figure 15: Wiring diagram for the BTL module

Output stage

The output stage is a half bridge topology with a 2nd order filter. The essential output characteristics are:

- The switching residual on the output primarily consists of a single frequency component at the carrier fundamental f_s .

The system bandwidth is 120 kHz in 8Ω (SE) and 110 kHz in 8Ω (BTL).

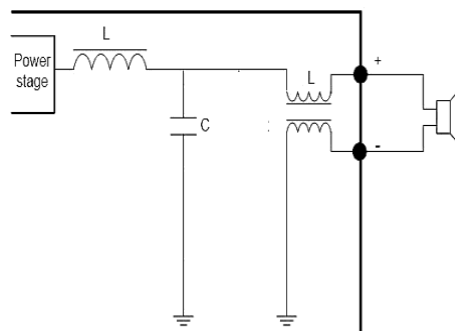


Figure 16: SE output filter section

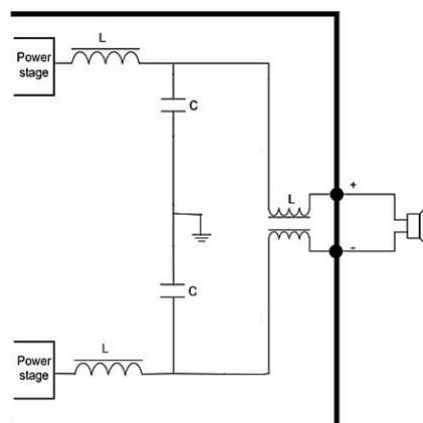


Figure 17: BTL output filter section

Operational Timing Diagram

The following diagram shows selected signals during power up/down (nominal mains).

Timing for changes in mains and enable levels

1. 700ms typ.
2. 2ms typ.
3. 100µs typ.
4. 2ms typ.
5. 1200ms max. (load/power dependent)
6. 50ms typ.

OC and Thermal pins have the same response delays as the Enable pin from when the OC or thermal error is detected.

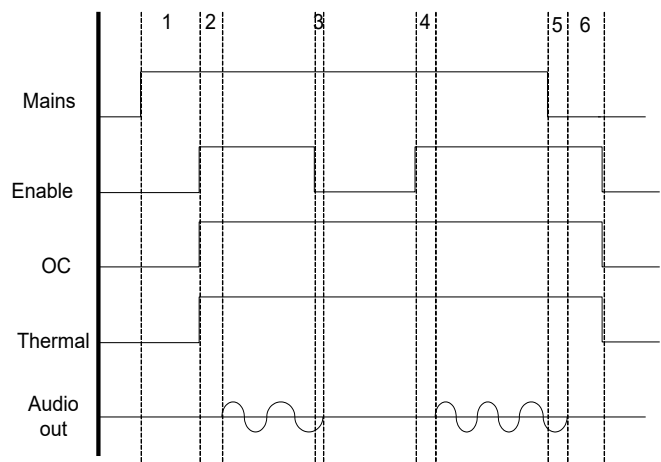


Figure 18: Timing – enable and mains

Thermal Design

Thermal design is generally a great challenge in power amplifier systems. Linear amplifier designs operating in class A or AB are normally very inefficient and therefore equipped with extensive heat sinking to keep the transistor junction temperature low. The ICEpower50ASX2 is based on highly efficient ICEpower switching technology providing high overall efficiency characteristics at all levels of operation.

Part of the “component” philosophy of the ICEpower50ASX2 module is to provide a self-cooled component thus eliminating the need for special attention to thermal design.

The ICEpower50ASX module is designed for music reproduction, which means that the output power of the amplifier will never be continuous. Research has shown that the long-term RMS level of any music signal does not normally exceed 1/8th of the maximum non clipped RMS value, rated output power and the power supply is therefore designed for large short-term power handling and lower continuous power handling. If the average output power of the ICEpower50ASX exceeds 43W @ 4Ω (SE-version with both channels driven) or 50W @ 4Ω (BTL-version) for a long time at 25°C ambient temperature, the module will reach its maximum allowable temperature, and the temperature protection will be activated.

Further information about thermal design can be found in the ICEpower ASX designer’s manual.

Physical Dimensions

All dimensions are in mm.

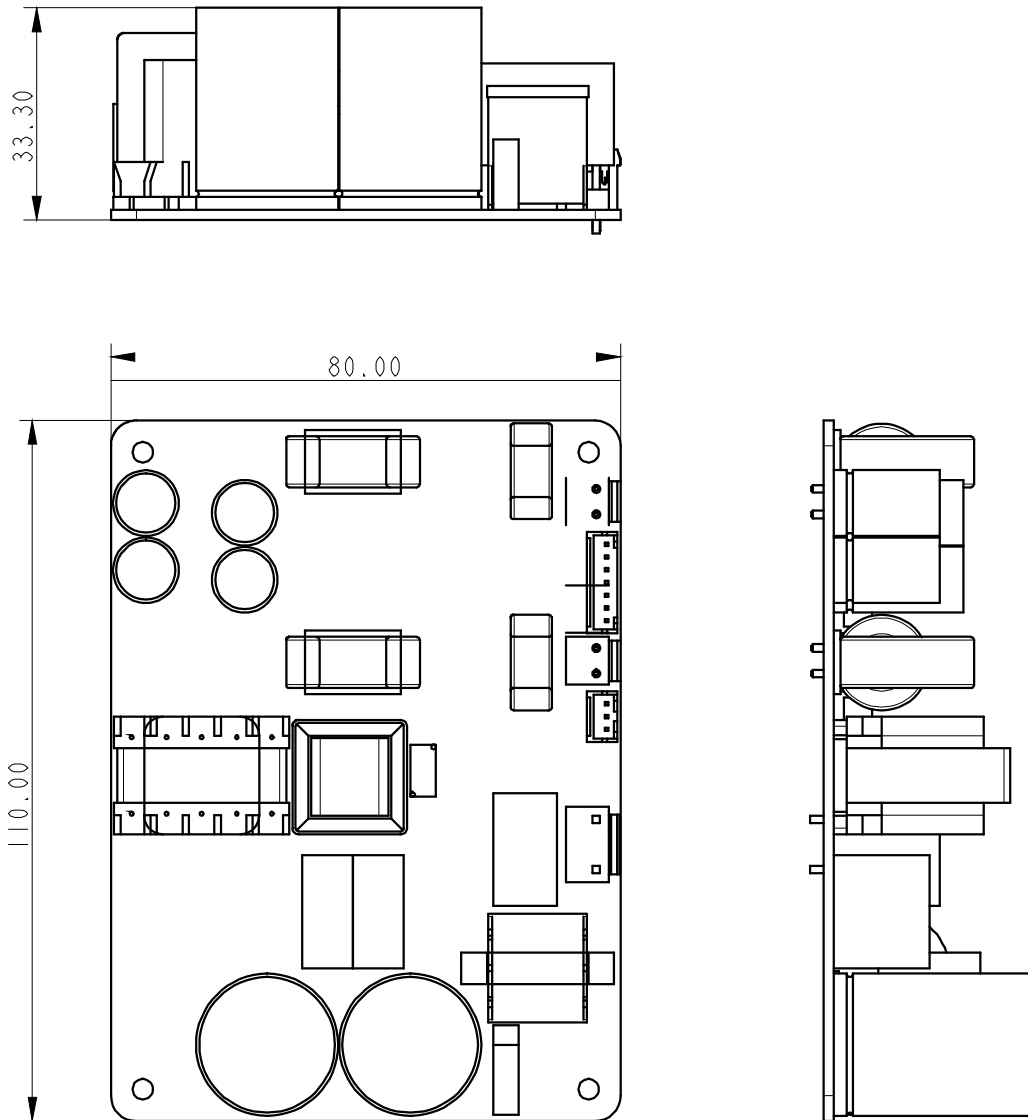


Figure 19: Physical dimensions in mm.

Important! A minimum clearance of 12 mm around the module is required for safety and ventilation reasons.

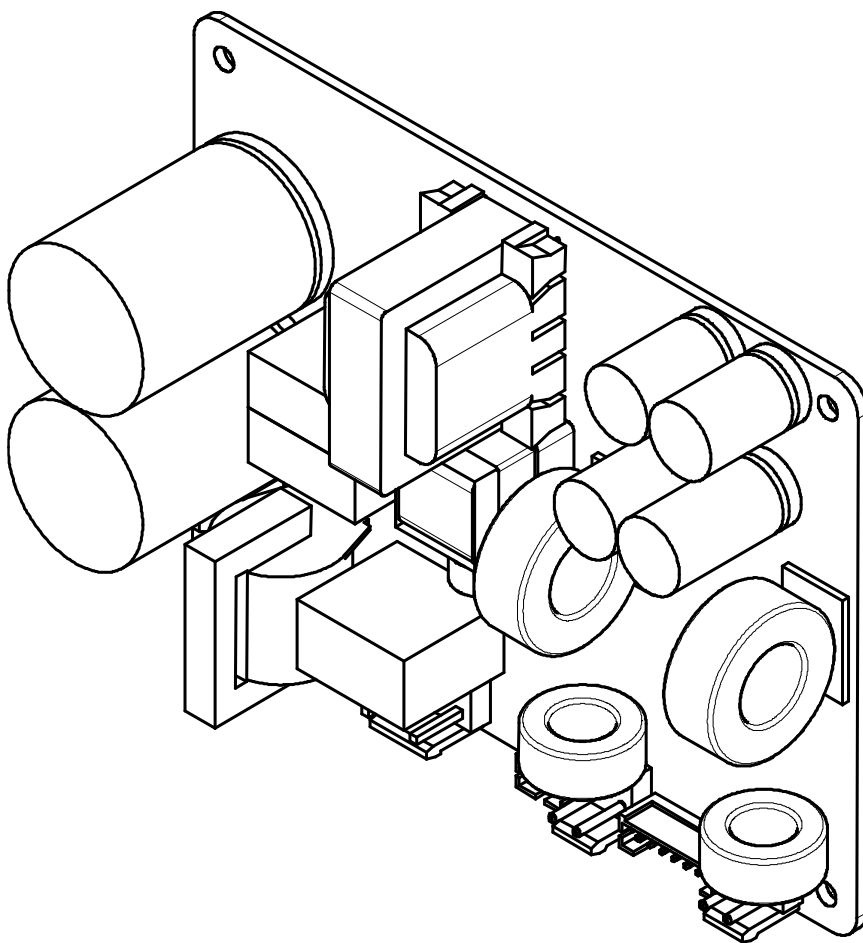


Figure 20: 3D-view of the ICEpower50ASX board

Drill Pattern

All dimensions are in mm. The diameter of the mounting holes is 3.5 mm.
Height above the PCB is 30 mm.

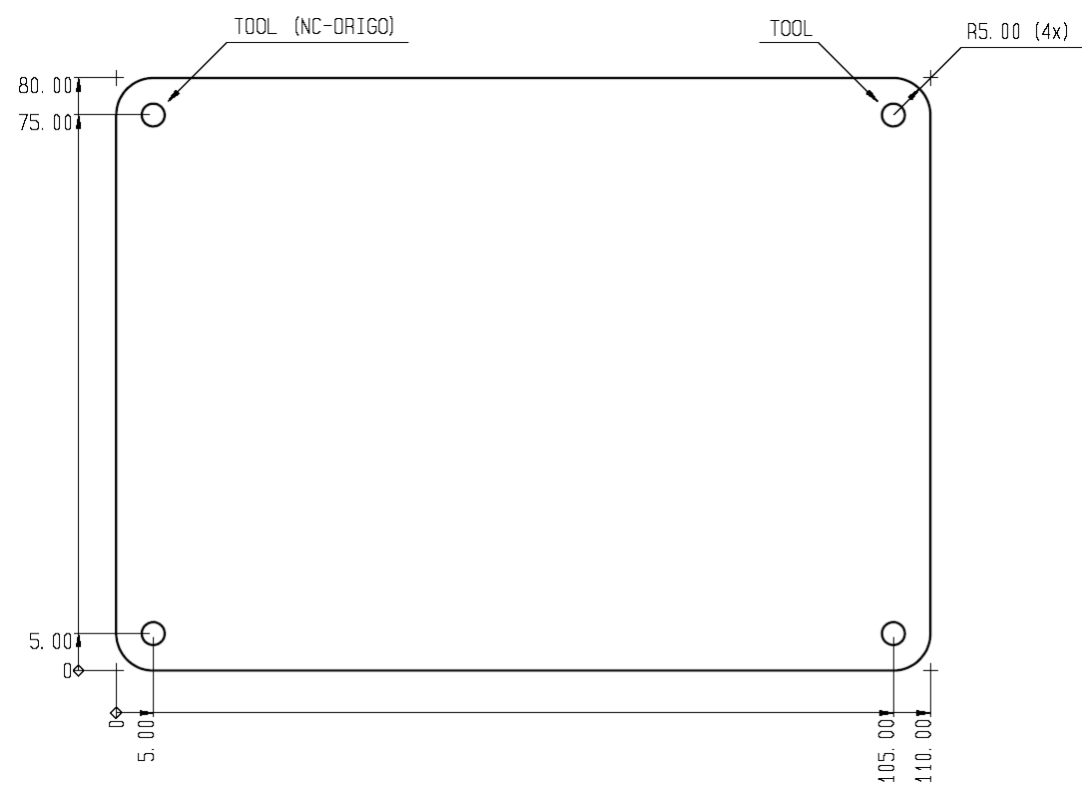


Figure 21: PCB drill pattern.

Safety Standards

The ICEpower50ASX2 has been safety approved by UL to ease the design-in procedure and complies with the following standards:

Europe: IEC 62368: 2014 (second edition)

US: UL 62368-1 and CAN/CSA C22.2 No. 62368-1-14

EMC

- EN 55032: Note 1

Note1: Depends on cable routing on the mains/amplifier outputs and load characteristics. Connecting safety ground to the mains side/ Additional filtering may be needed.

Safety Class

Class 2 (without earth)

ESD Warning

ICEpower products are manufactured according to the following ESD precautions:

- IEC 61340-5-1: Protection of electronic devices from electrostatic phenomena. General Requirements.
- IEC 61340-5-2: Protection of electronic devices from electrostatic phenomena. User Guide.
- ANSI/ESD-S20.20-1999: Protection of Electrical and Electronic Parts, Assemblies and Equipment.

Further handling of the products should comply with the same standards.

The general guarantee policy of ICEpower a/s does not cover ESD damaged products due to improper handling.

Packaging and Storing

Dimensions and weight:

Package	Quantity	Dimensions (w x d x h) [mm]	Gross Weight [kg]
Carton	56	390 x 580 x 210	12,4 KG
Pallet	1344	800 x 1200 x 1470	323 KG

ESD safe cardboard is used for wrapping.

Order codes	Description	Part number
ICEpower50ASX2(BTL)	1x170W ICEpower Amplifier with integrated ICEpower Supply	8003225
ICEpower50ASX2(SE)	2x50W ICEpower Amplifier with integrated ICEpower Supply	8002660

Storage humidity

Do not expose the pallets to rain or humidity levels higher than 85%.

Storage temperature

The pallets are to be stored at temperatures from 0°C to 70°C.

Stacking

Pallets may not be stacked on top of each other.

Contact

For additional information about the ICEpower® technology from ICEpower a/s, visit our web site or contact us.

ICEpower a/s
Vandtårnsvej 62A. 3rd floor B
DK-2860 Søborg
Denmark

www.icepower.dk
info@icepower.dk

Legal Notes

ICEpower a/s believes that the information in this datasheet is accurate and reliable. However it is provided "as is" without any warranties of any kind. ICEpower a/s and its suppliers, to the fullest extent permitted by law, disclaim all warranties, including the warranty of merchantability, warranty of non-infringement of third-party rights, and the warranty of fitness for a particular purpose. ICEpower a/s and its suppliers make no warranties about the accuracy, reliability, completeness, or timeliness of the material, services, software, text, graphics and links. In no event will ICEpower a/s be liable to any party for any damages whether direct, indirect, special, consequential or other for any use or inability to use of this datasheet, including, without limitation, any damages for lost profits, business interruption, loss of programs or other data on your information handling system or otherwise, even if we are expressly advised of the possibility of such damages.

Information in this datasheet may contain technical inaccuracies or typographical errors. The information in the datasheet may be changed at any time without prior notice or obligation.

ICEpower® is a trademark of ICEpower a/s.

ICEpower a/s products are not authorized for use as critical components in life support devices or life support systems without the express written approval of the president and general counsel of ICEpower a/s. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labelling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ICEpower a/s ©2016