


Twt28_vHP

28mm soft dome tweeter.



28mm soft dome designed to provide the best performances in its price range. Thanks to the technical innovation, it challenges many more expensive competitors. Very clear and detailed sounding. We recommend to use this tweeter from 2500 with 12dB/Oct. high-pass filter.

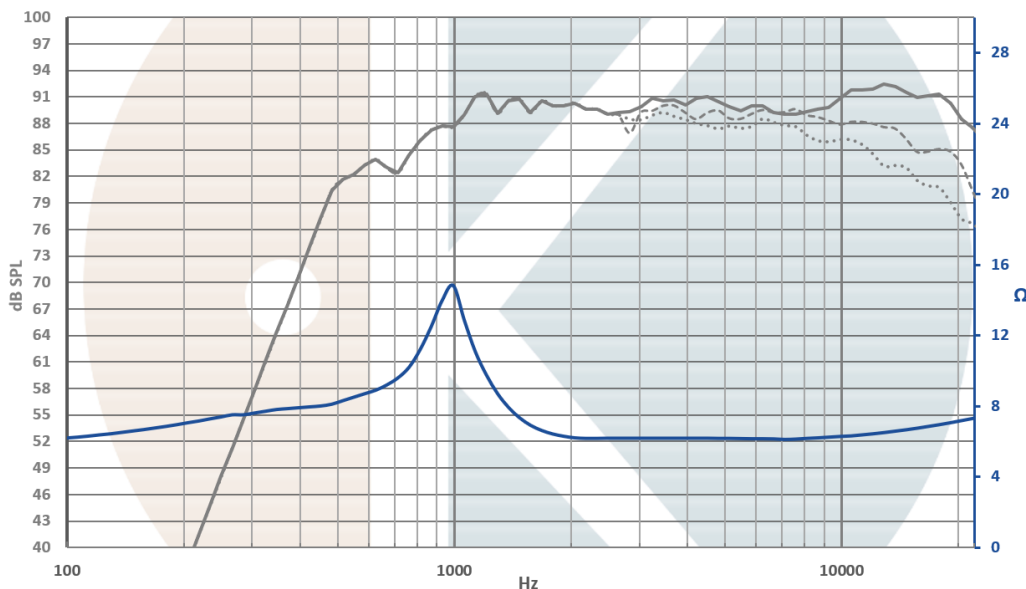

Twt28_vHP

Our products can be adapted to your technical requirements and brand spirit.

www.Kartesian-acoustic.com - France



Edition2

Advanced construction

Membrane

Proprietary treated Nylon
Ø28mm soft dome

Suspension

Integrated on the dome

Voice coil:

Ø28mm, CCA wire
Aluminum former

Motor structure:

High grade Ferrite magnet
Advanced and vented pole pieces
16500 Gauss on 2.4mm height

Frame

Aluminum injected front plate
Back chamber built in the motor structure

T&S


Fs 1000Hz
SPL 90dB/2.8V/1m
Re 5.2Ω

Qms -
Qts -
Bl 2.65N/A

VAS -
Mms 0.24g
Sd 6.16cm²

Linear excursion: +/-0.15mm
Maximal excursion: +/-0.3mm

Nominal power: 20W
Maximal power handling: 40W
(with high-pass filter, 12dB/Oct at 2200Hz)

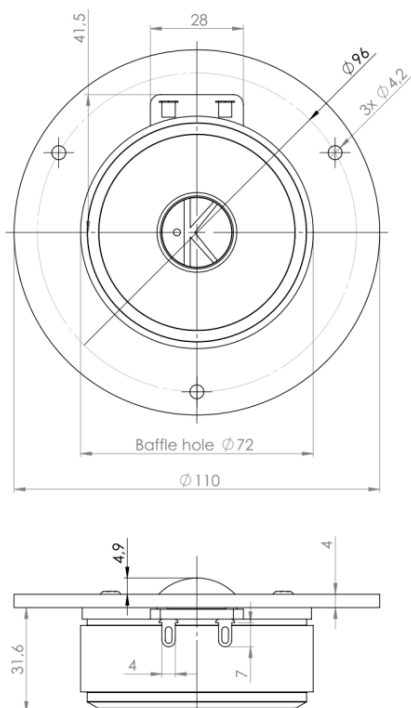

Integrated innovation



.foKus field



.Konstant Bl(X)



.Konstant Le(X)

Visit our website to discover our innovation

Twt28_vHP

Our products can be adapted to your technical requirements and brand spirit.
www.Kartesian-acoustic.com - France

Edition2

