# TW500My-Nd

*Professional Super Tweeter*

## KEY FEATURES

- 1.25” Voice coil
- 150 Watts continuous power handling
- 108 dB Sensitivity
- Neodymium Magnet
- Mylar Diaphragm

## GENERAL SPECIFICATIONS

| | |
|---|---|
| Nominal Impedance | 8 Ohms |
| **Rated Power Handling** | **75 Watts** |
| Program Power | 150 Watts |
| **Sensitivity 2.83V at 1m*** | **108 dB** |
| Recommended High Pass Crossover** **for Full Power Handling | 4000 Hz*** ***12db/oct Crossover |
| **Frequency Response at -10dB** | **3,500-19,000Hz** |
| Voice Coil Diameter | 1.25”(32 mm) |
| Voice Coil Wire | Aluminum |
| Voice Coil Former Material | Kapton® |
| Diaphragm Material | Mylar |
| Flux Density | 1.30 T |
| Magnet Material | Neodymium |

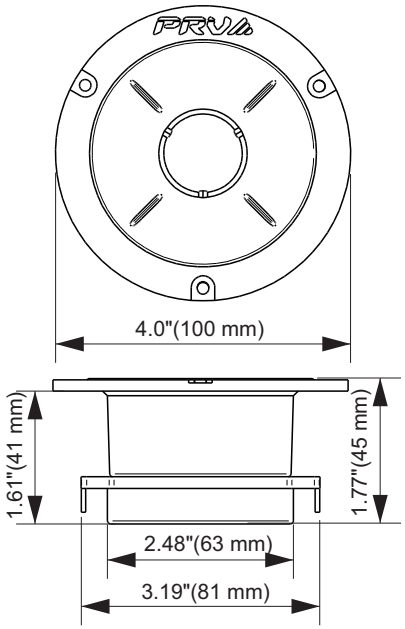


## EXTRA INFO

| | |
|---|---|
| Overal depth | 1.77” (45 mm) |
| Mounting Depth | 1.61” (41 mm) |
| Overal Diameter | 4.0” (100 mm) |
| Cutout Diameter | 3.19” (81 mm) |
| Net Weight | 1.25 lbs (0.56 kg) |
| Shipping Weight | 1.33 lbs (0.60 kg) |
| Carton Dimensions W x L x H | 4.1” x 4.1” x 2.1” (105 x 105 x 55 mm) |

**Frequency Response Measured at 2.83v/1m**

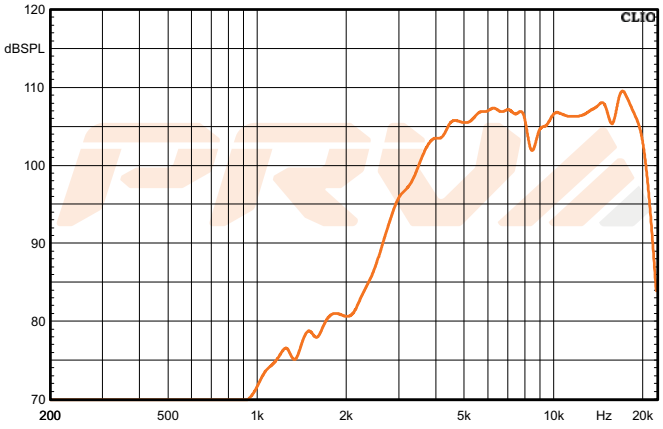


Response curve without capacitor

PRV AUDIO USA (USA and Export)
FORT LAUDERDALE, FL
support@prvaudio.com
www.prvaudio.com

PRV AUDIO BRAZIL (Brazilian Sales Only)
SAO LEOPOLDO, RS
vendas@pvaudio.com.br
www.pvaudio.com.br

PRV Audio strives to manufacture the best drivers in the Professional Loudspeaker industry. Specifications are subject to change due to continuous product improvement - Rev: 07/18