TW700Ti

Professional Super Tweeter

PRV AUDIO BRAZIL

KEY FEATURES

- 1.5” Voice coil
- 120 Watts continuous power handling
- 107 dB Sensitivity
- Double Magnet
- High grade Titanium Diaphragm

GENERAL SPECIFICATIONS

Nominal Impedance	8 Ohms
Rated Power Handling	**120 Watts**
Program Power	240 Watts
Sensitivity 2.83V at 1m*	**107 dB**
Recommended High Pass Crossover** **for Full Power Handling	5000 Hz*** ***12 db/oct Crossover
Frequency Response at -10dB	**3,500-20,000Hz**
Voice Coil Diameter	1.5”(38 mm)
Voice Coil Wire	Copper
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.60 T
Magnet Material	Ferrite

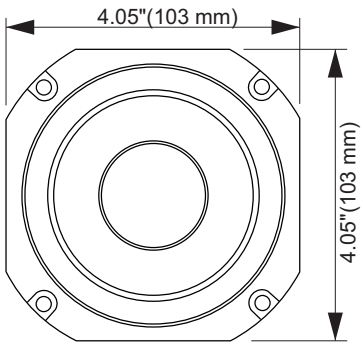

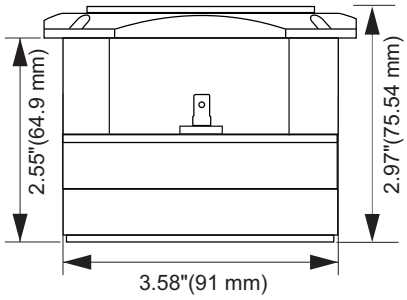

Frequency Response Measured at 2.83v/1m

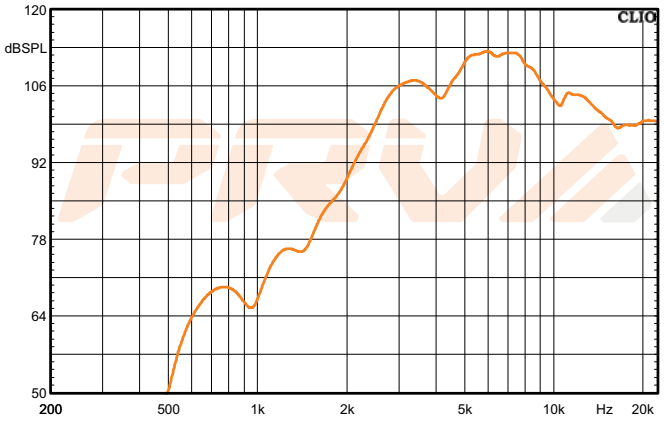

EXTRA INFO

Overal depth	2.97” (75.54 mm)
Mounting Depth	2.55” (64.9 mm)
Overal Width	4.05” (103 mm)
Overal Heigth	4.05” (103 mm)
Cutout Diameter	3.58” (91 mm)
Net Weight	3.48 lbs (1.58 kg)
Shipping Weight	3.62 lbs (1.64 kg)
Carton Dimensions W x L x H	4.5” x 4.5” x 3.25” (114 x 114 x 82.5 mm)

PRV AUDIO USA (USA and Export)
FORT LAUDERDALE, FL
support@prvaudio.com
www.prvaudio.com

PRV AUDIO BRAZIL (Brazilian Sales Only)
SAO LEOPOLDO, RS
vendas@pvaudio.com.br
www.pvaudio.com.br

PRV Audio strives to manufacture the best drivers in the Professional Loudspeaker industry. Specifications are subject to change due to continuous product improvement - Rev: 08/18