

15NW100 4 Ω

Subwoofer

- 2000 W continuous program power capacity
- 100 mm (4 in) copper voice coil
- 35 - 1500 Hz response
- 95 dB sensitivity
- FEA optimized Neodymium magnet assembly
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression



15NW100 4 Ω

Subwoofer

SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Nominal Impedance	4 Ω
Minimum Impedance	4.7 Ω
Nominal Power Handling	1000 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	2000 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	95 dB
Applied RMS Voltage is set to 2V for 4 ohms Nominal Impedance.	
Frequency Range	35 Hz - 1500 Hz
Voice Coil Diameter	100 mm (4 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	25 mm (1 in)
Magnetic Gap Depth	12 mm (0.5 in)
Flux Density	1.2 T
Woofer Cone Treatment	TWP Waterproof Both Sides

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	34 Hz
Re	3.7 Ω
Qes	0.23
Qms	5.41
Qts	0.23
Vas	126.1 dm³ (4.45 ft³)
Sd	855 cm² (132.5 in²)
η ₀	2 %
X _{max}	9 mm
X _{var}	11 mm
M _{ms}	180 g
Bl	24.54 Tm
Le	1.74 mH
EBP	148 Hz

DESIGN



Surround Shape	Triple Roll
Cone Shape	Radial
Magnet Material	Neodymium Inside Slug
Spider	Double Silicone
Pole Design	T-Pole
Woofer Cone Treatment	TWP Waterproof Both Sides
Recommended Enclosure	100 dm³ (3.53 ft³)
Recommended Tuning	40 Hz

MOUNTING AND SHIPPING INFO

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (14.7 in)
Baffle Cutout Diameter	354 mm (13.9 in)
Depth	181 mm (7.1 in)
Flange and Gasket Thickness	16 mm (0.62 in)
Air Volume Occupied by Driver	6 dm³ (0.21 ft³)
Net Weight	8.65 kg (19.07 lb)
Shipping Units	1 pcs
Shipping Weight	9.95 kg (21.94 lb)
Shipping Box	425x425x224 mm (16.73x16.73x8.82 in)


SERVICE KITS

LF recone-kits	RCK15NW1004
----------------	--------------------

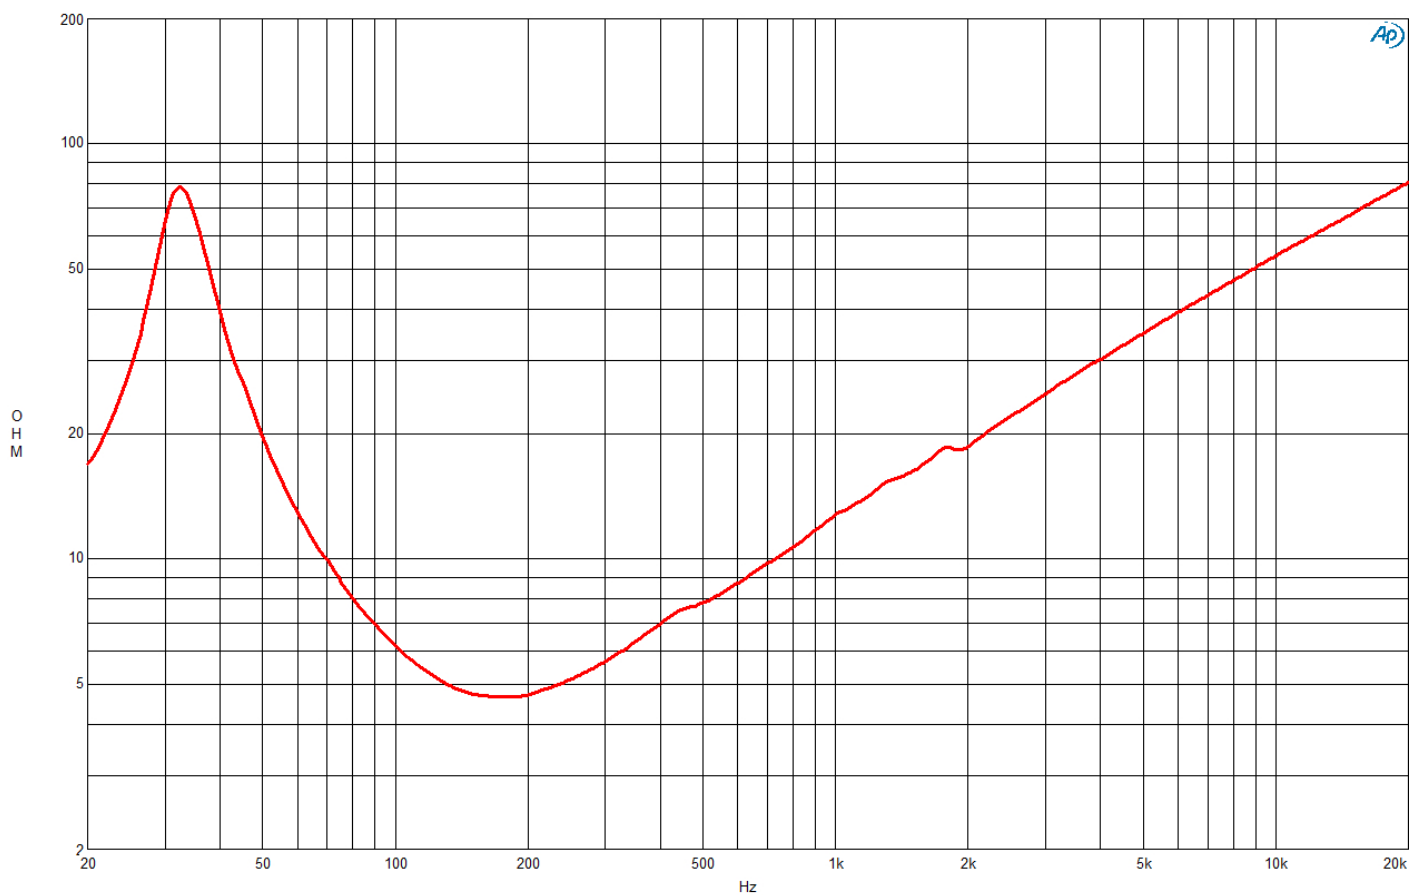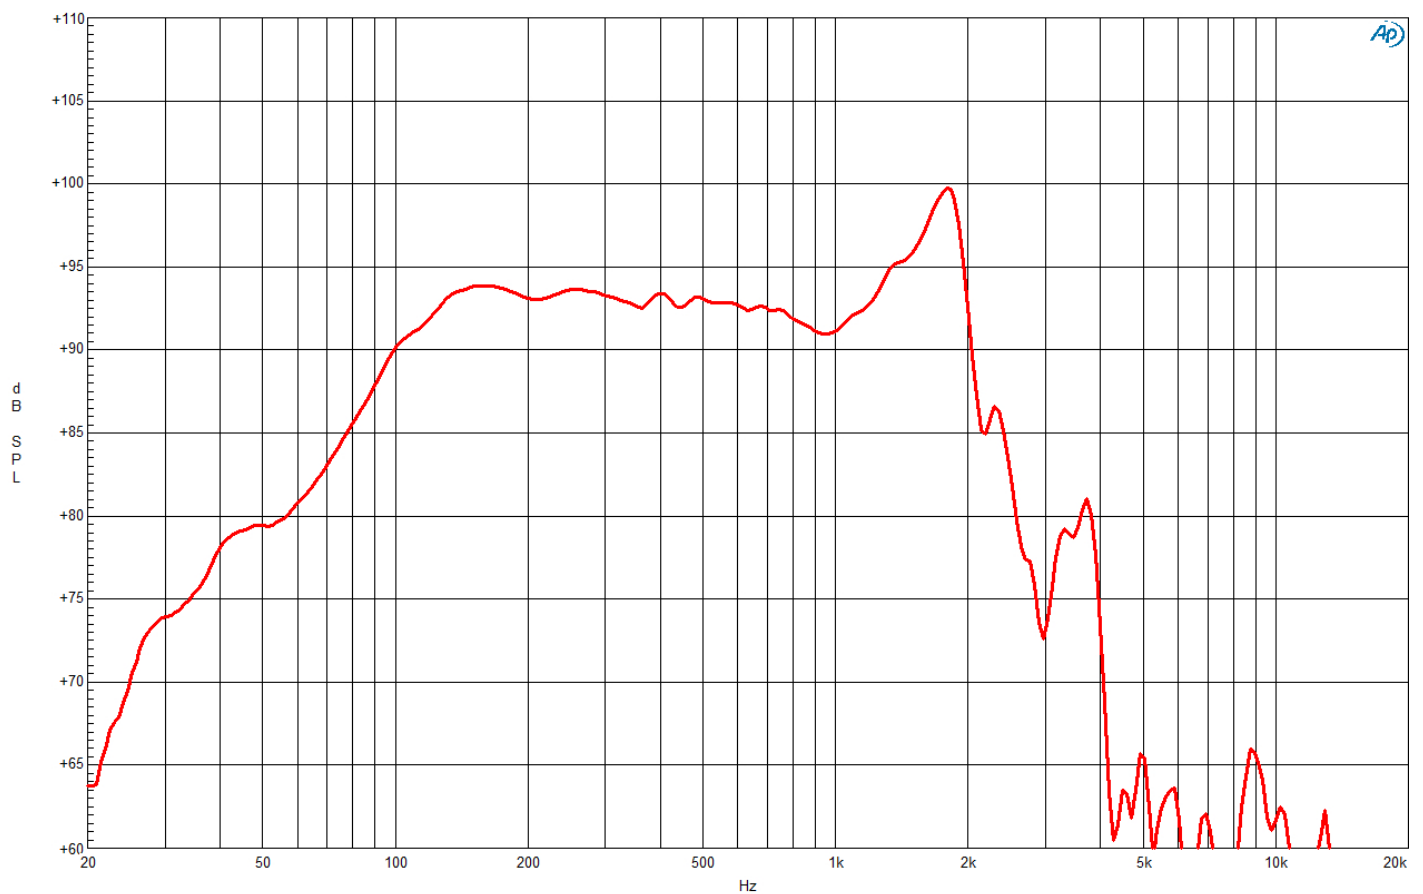



Frequency Response (2,83 Vrms/1 m)

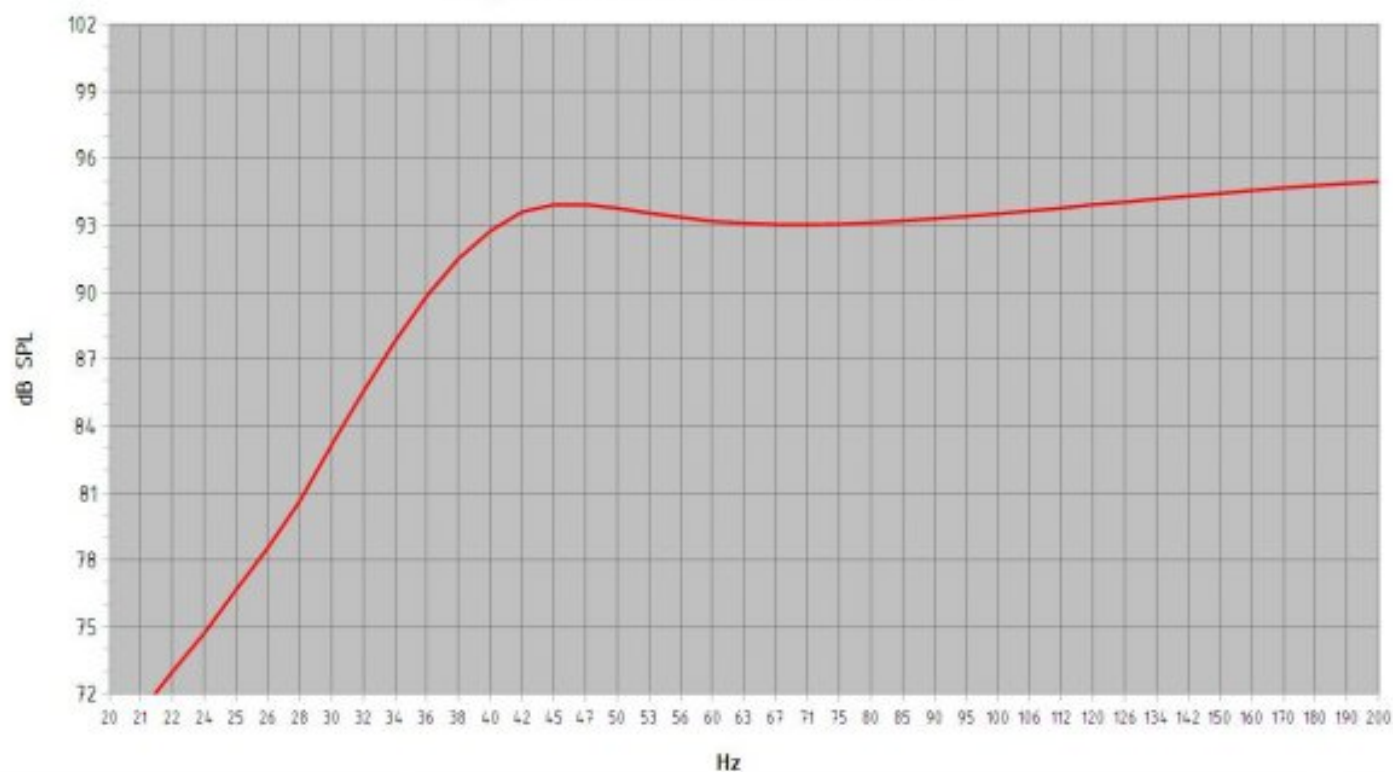

Model: **15 NW 100**
Enclosure Type: **Bass Reflex**

Internal Net Volume (Liters): **100**
Tuning Frequency (Hz): **40**
Frequency (-3 dB) (Hz): **40,5**
Port Area (cm²): **222,3**
Port Length (cm): **27,1**

Excursion Limited Maximum SPL at 1 meter (dB): **121,0** equal to **414,8** Watts (Bass Band Power Rating)
Thermal Limited Maximum SPL at 1 meter (dB): **124,8** equal to **1000,0** Watts (Mid Band Power Rating)

15NW100 4 Ω

Subwoofer

