XXLS-P835017

SUBWOOFER

- Aluminum Diaphragm
- NBR Rubber Surround
- High Excursion

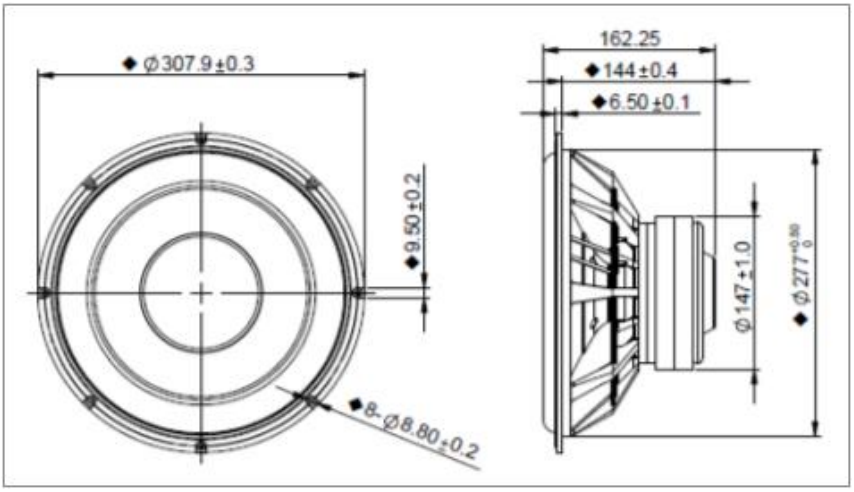

SPECIFICATIONS			
Transducer Size		12	in
Impedance		4	Ω
Frequency Range [1]		20 - 4000	Hz
Sensitivity [2] **(2.83V | 1W @ 1m)**		88.8 | 85.8	dB
Power Rating (IEC 268-5)		120	W
Voice Coil Size		51	mm
Air Gap | Winding Height	H_{ag} | H_{vc}	8 | 32.6	mm
Net Weight		6.4	kg
PARAMETERS [3]			
Eff. Piston Area	S_d	511	cm^2
DC Resistance	R_e	2.6	Ω
Minimum Impedance	Z_{min}	3.1	Ω
Inductance	L_e	0.429	mH
Resonance Frequency [4]	F_s	23	Hz
Mechanical Q Factor	Q_{ms}	10.4	-
Electrical Q Factor	Q_{es}	0.444	-
Total Q Factor	Q_{ts}	0.43	-
Moving Mass	M_{ms}	129	g
Compliance	C_{ms}	360	µm/N
Equivalent Volume	V_{as}	133	L
Motor Force Factor	Bl	10.5	Tm
Motor Efficiency	β	42.6	$(Bl)^2 / R_e$
Linear Excursion [5]	X_{max}	15	mm
Max Mechanical Excursion [6]	X_{mech}	22.3	mm

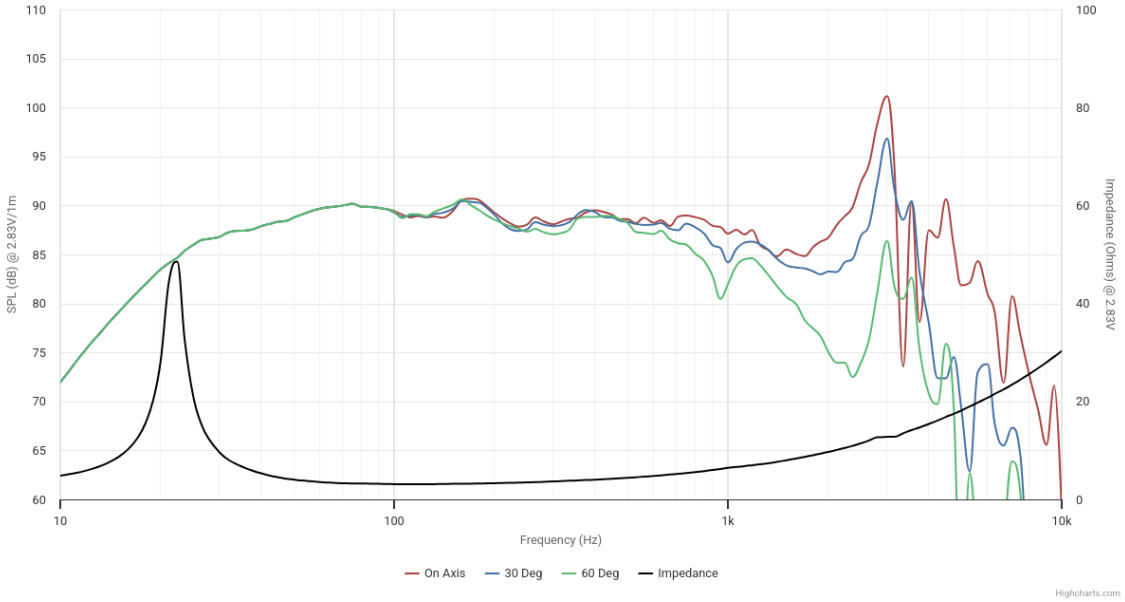

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tymphany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. [1] Specified by Engineering as linear working range of transducer. [2] Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. [3] Measured in Free Air without preconditioning, therefore subject to some deviation. [4] Impedance and Fs value measured under different conditions. [5] Equal/Overhung: $(H_{vc} - H_{ag})/2 + H_{ag}/3$. Underhung: $(H_{ag} - H_{vc})/2 + H_{vc}/3$. [6] Mechanically limited excursion (e.g. bottoming, spider crash).

© Tymphany Enterprises