

DE14 16 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	16 Ω
Minimum Impedance	11.6 Ω
Nominal Power Handling	30 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	60 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	106.5 dB
Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.	
Frequency Range	2 kHz - 18 kHz
Recommended Crossover	2.2 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.45 T
Diaphragm Material	Mylar

- 60 W continuous program power capacity
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- Polyester diaphragm
- 1500 - 18000 Hz response
- 106.5 dB sensitivity

MOUNTING AND SHIPPING INFO



Two M5 holes 180° on 76 mm (3 in) diameter Three M6 holes 120° on 57 mm (2.2 in) diameter

Overall Diameter	90 mm (3.5 in)
Depth	49 mm (1.93 in)
Net Weight	1 kg (2.2 lb)
Shipping Units	1 pcs
Shipping Weight	1.03 kg (2.27 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMD01416
--------------------------	-----------------

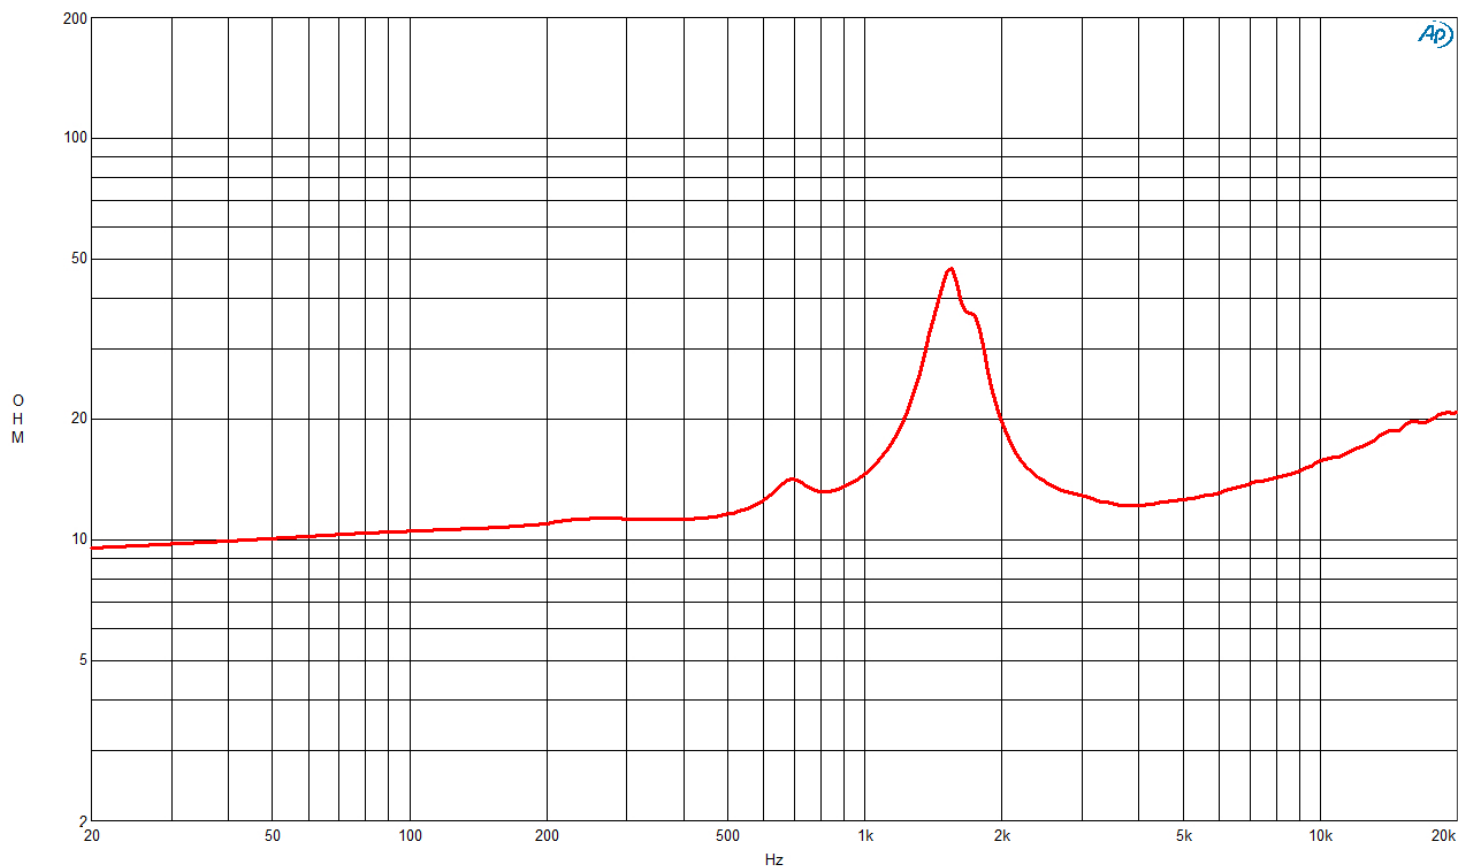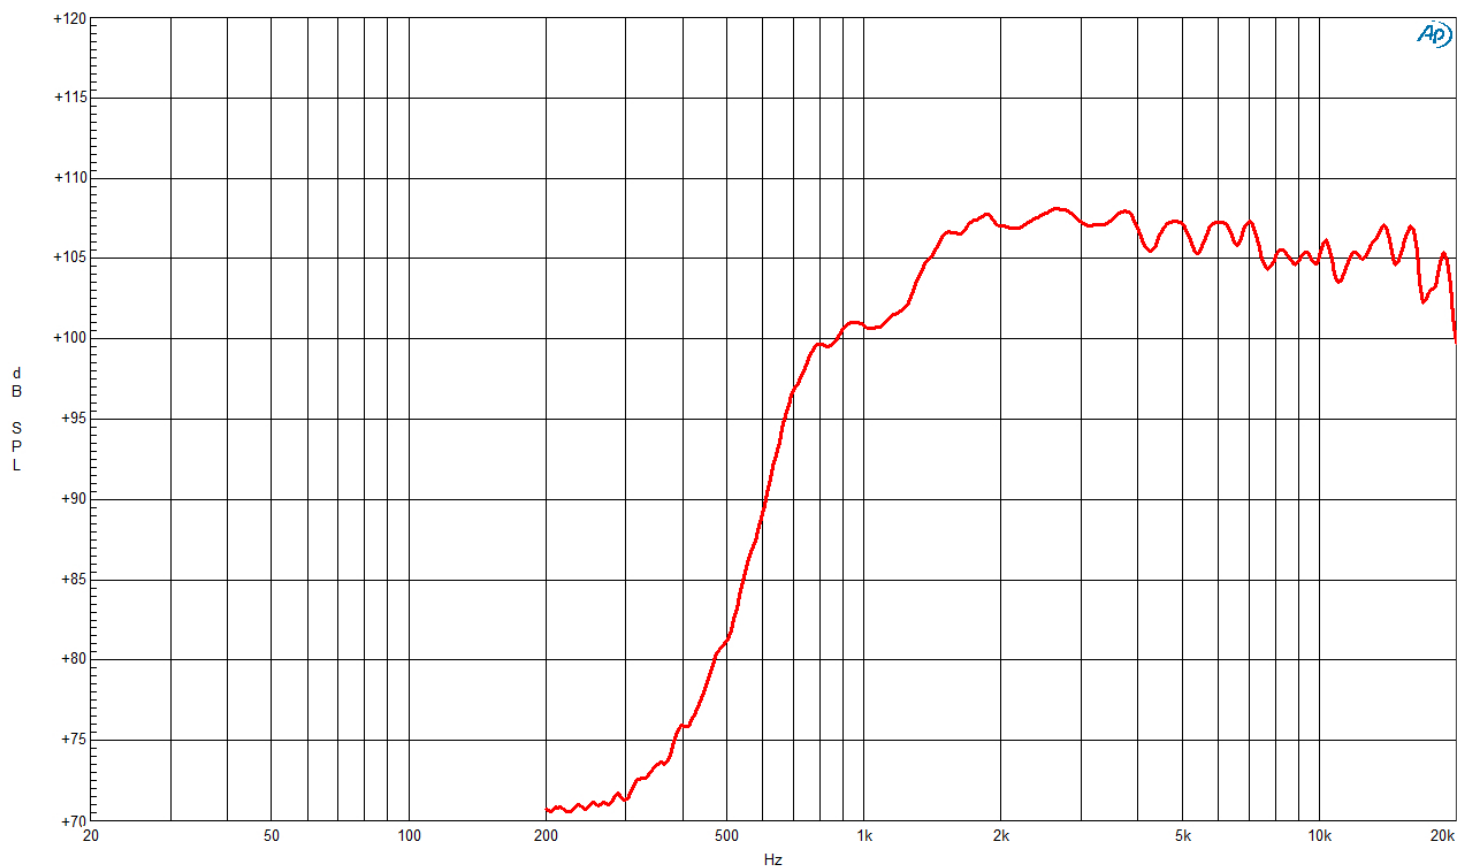

DE14 16 Ω

DE14 16 Ω

