

DE990TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME90 horn

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.6 Ω
Nominal Power Handling	100 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	200 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	107.5 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	0.5 kHz - 18 kHz
Recommended Crossover	1 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	86 mm (3.4 in)
Winding Material	Aluminium
Inductance	0.1 mH
Flux Density	1.9 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	118 mm (4.65 in)
Depth	63 mm (2.48 in)
Net Weight	2 kg (4.41 lb)
Shipping Units	1 pcs
Shipping Weight	2.04 kg (4.5 lb)
Shipping Box	120x120x65 mm (4.72x4.72x2.56 in)

SERVICE KITS



HF replacement-diaphragm	MMD35ETN8M
--------------------------	-------------------

- 200 W continuous program power capacity
- 1.4" horn throat diameter
- 86 mm (3.4 in) aluminium voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 107.5 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

The DE990TN is a uniquely compact 86mm (3.4 in) voice coil, neodymium high frequency driver. The compact 118mm diameter was achieved using a specially milled inside ring neodymium magnet. The diaphragm used in the DE990TN has been completely redesigned to incorporate a bent edge voice coil former, new dome and surround geometry and an optimized phase plug. These modifications combine to better control diaphragm displacement and deformations, resulting in lower distortion and a smoother higher frequency response above 10kHz.



DE990TN 8 Ω

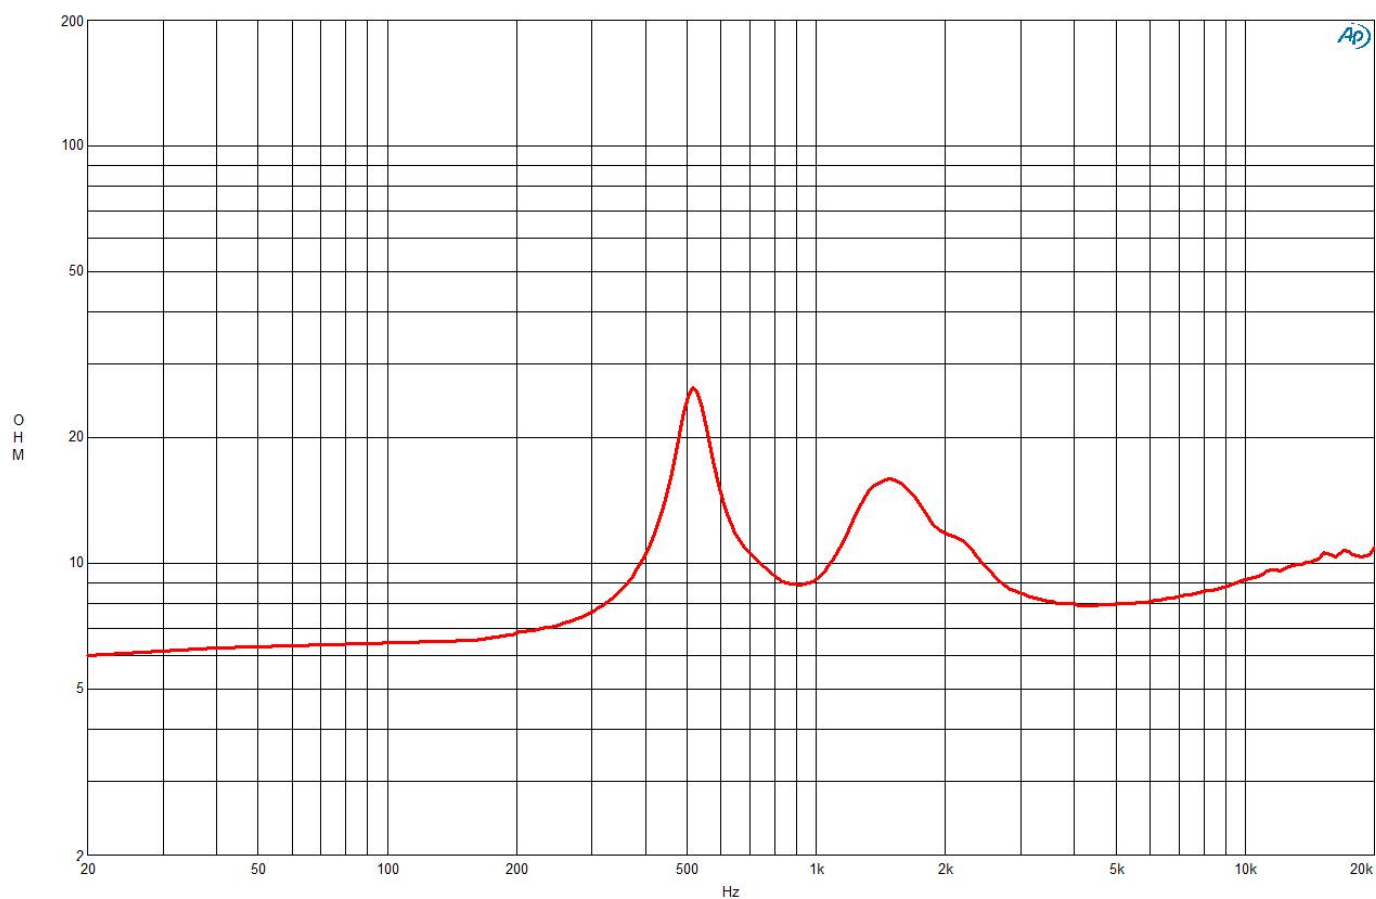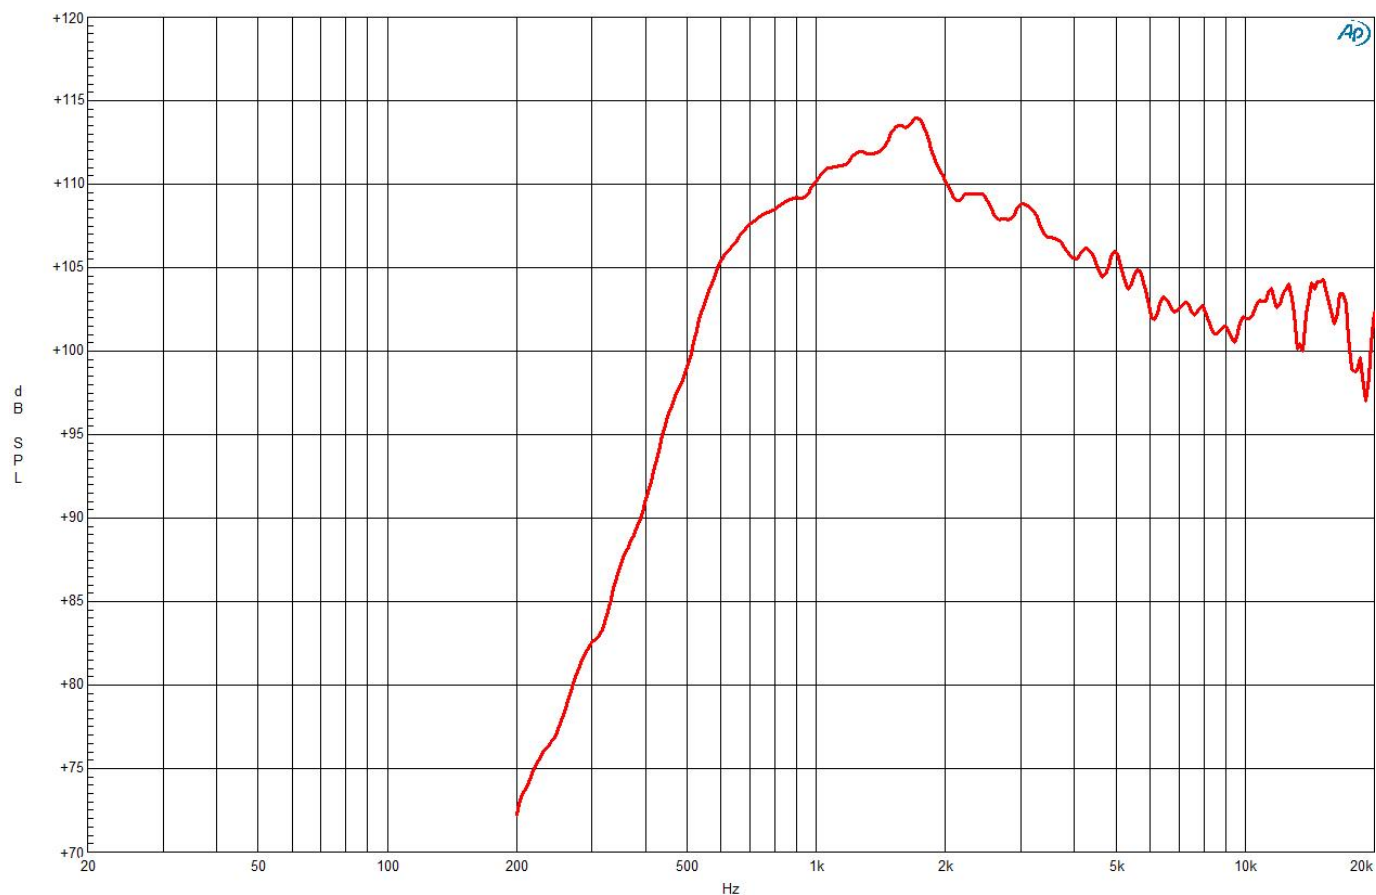

DE990TN 8 Ω

