



N210T-8

- **LOW CUTOFF FREQUENCY**
- **HIGH POWER HANDLING**
- **LIGHT WEIGHT**
- **8 OHMS**



The most copied compression diaphragm of all time? Our pure titanium dome design has been going strong for over 30 years. The unique tangential-radial ribbed surround has stood the test of time in countless speakers across the pro sound industry.

Run with the workhorse that wins with industry professionals year after year.

FEATURES

- 2" voice coil that provides extra power handling and low frequency extension
- Compact neodymium motor
- Total weight of less than 2lbs
- Fast-On terminal spades for quick-connect and/or soldering
- Rugged die cast cover removes heat


SPECIFICATION

Throat Size	1", 25.4mm
Nominal Impedance*	8Ω
Minimum Impedance	8.6 ohm @ 5.7 kHz
Power Rating**	50 W (AES)
Resonance	0.599 kHz
Usable Frequency Range	1.5kHz-20kHz
Recommended Crossover	1.5kHz / 12 dB kHz
Sensitivity***	108.5
Magnet Material	Neodymium
Magnet Weight	4.16oz, 0.31kg
Voice Coil Diameter	2" / 50.8mm
Voice Coil Former	Polyimide
Diaphragm Material	Titanium
DC Resistance (Re)	6.7 Ω

MOUNTING INFORMATION

Overall Diameter	3.85", 97.8mm
Driver Volume Displaced	0.008 cu.ft., 0.22 liters
Depth	1.58", 40.2mm
Weight	1.97 lbs., 89 kg
Mounting Thread	N/A
Mounting Holes Diameter	2x 1/4-20
Mounting Holes B.C.D.	3 in. 76.2 mm

FREQUENCY RESPONSE & IMPEDANCE CURVE*

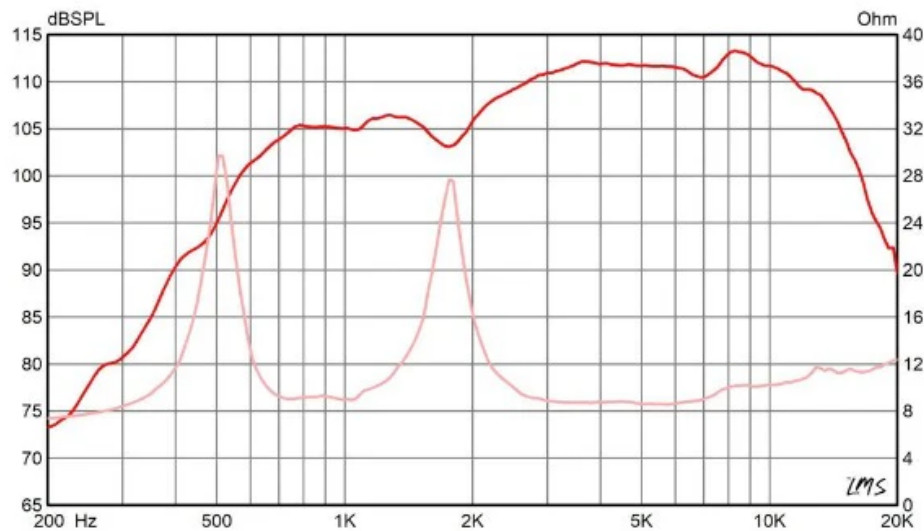

LEARN MORE AT EMINENCE.COM

See footnotes for information regarding usable frequency range, nominal impedance,