

DE1050 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 75 horn.

Throat Diameter	50 mm (2 in)
Nominal Impedance	8 Ω
Minimum Impedance	8.1 Ω
Nominal Power Handling	140 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	280 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	109 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	500 kHz - 20 kHz
Recommended Crossover	0.8 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	100 mm (4 in)
Winding Material	Aluminium
Inductance	0.18 mH
Flux Density	1.95 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	154 mm (6.1 in)
Depth	86 mm (3.39 in)
Net Weight	3.7 kg (8.16 lb)
Shipping Units	1 pcs
Shipping Weight	4 kg (8.82 lb)
Shipping Box	195x195x120 mm (7.68x7.68x4.72 in)



SERVICE KITS

HF replacement-diaphragm	MMD4ATN8M
--------------------------	------------------

- 280 W continuous program power capacity
- 2" horn throat diameter
- 100 mm (4 in) aluminium voice coil
- Titanium diaphragm
- 500 - 20000 Hz response
- 109 dB sensitivity
- Neodymium magnet assembly with shorting copper cap



DE1050 8 Ω

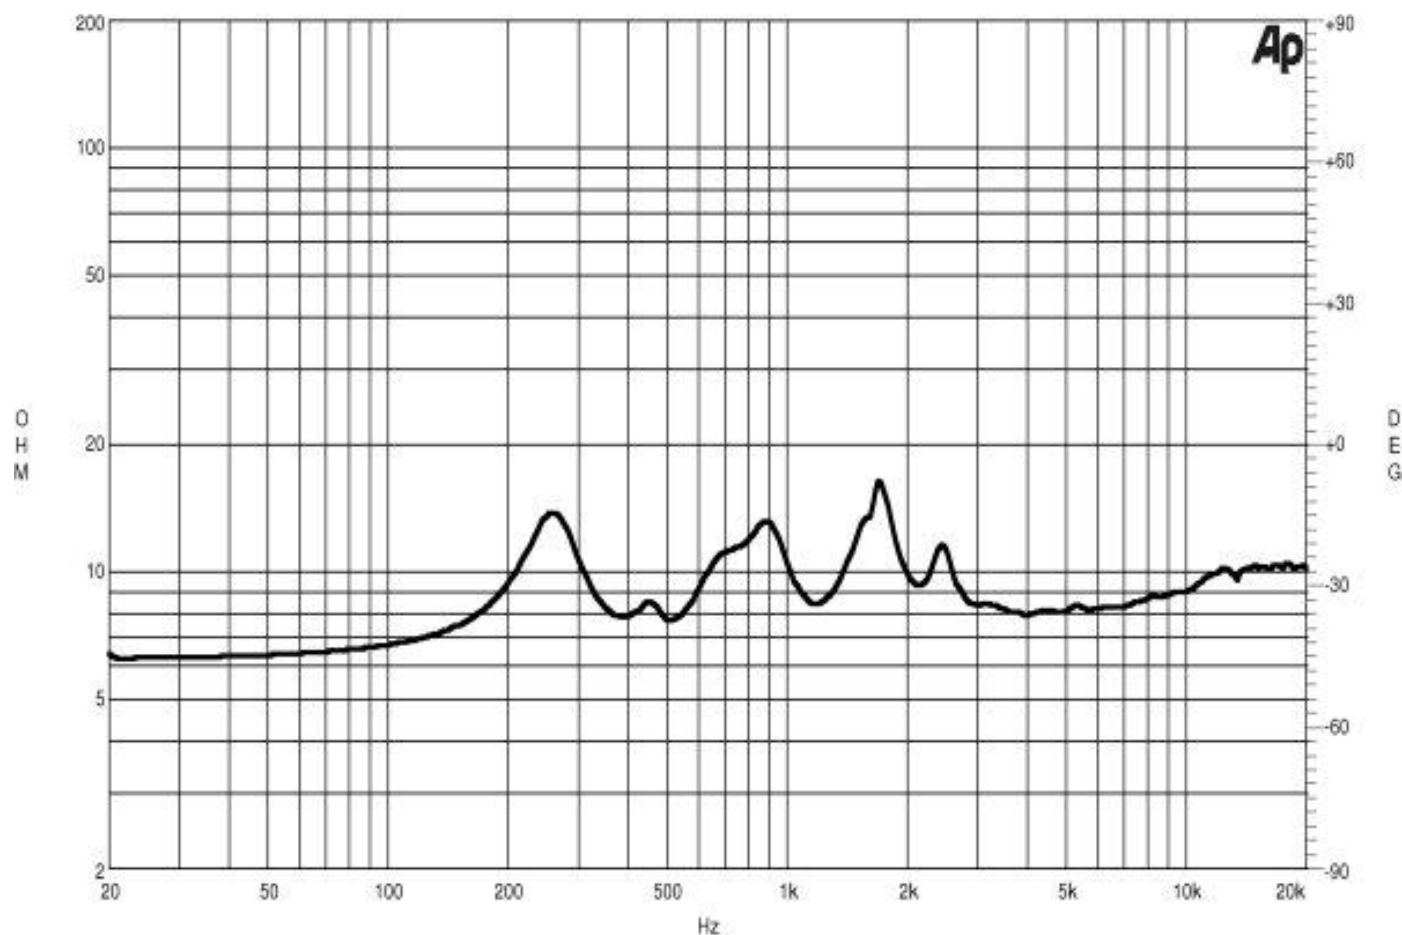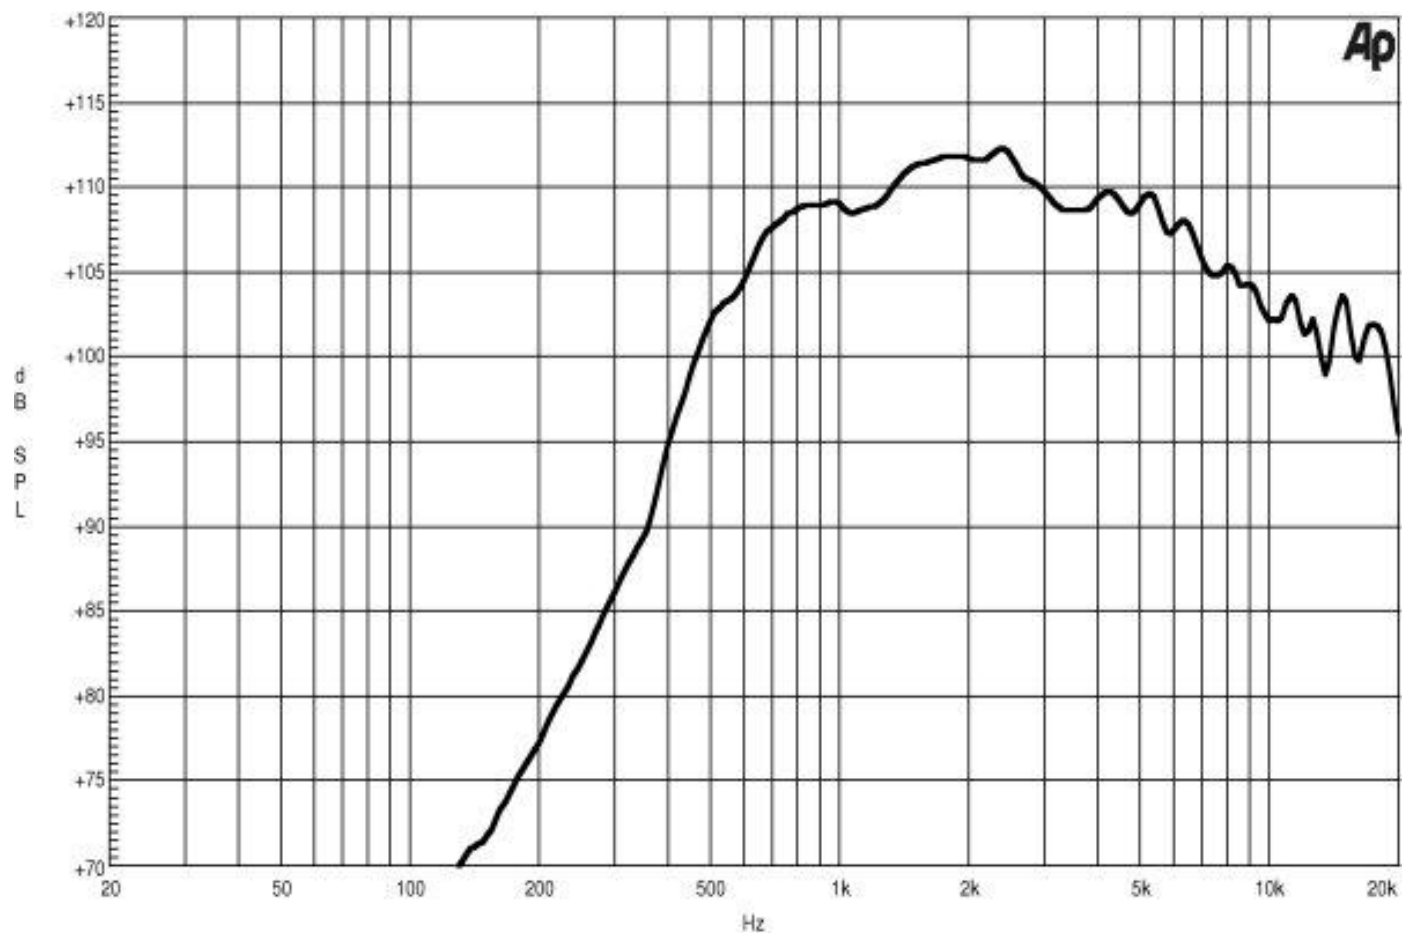

DE1050 8 Ω

