D280TI-B

Professional Compression Driver

PRV AUDIO BRAZIL

KEY FEATURES

- 1.75” Voice coil
- 80 Watts continuos power handling
- 109 dB Sensitivity
- High gradeTitanium Diaphragm

GENERAL SPECIFICATIONS

Exit Throat Diameter	1” (25.4mm)
Nominal Impedance	8 Ohms
Rated Power Handling	**80 Watts**
Program Power	160 Watts
Sensitivity 2.83V at 1m*	**109 dB**
Recommended High Pass Crossover** **for Full Power Handling	1800 Hz*** ***12 db/oct Crossover
Frequency Response at -10dB	**1,300-20,000Hz**
Voice Coil Diameter	1.75”(44.4 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.65 T
Magnet Material	Ferrite

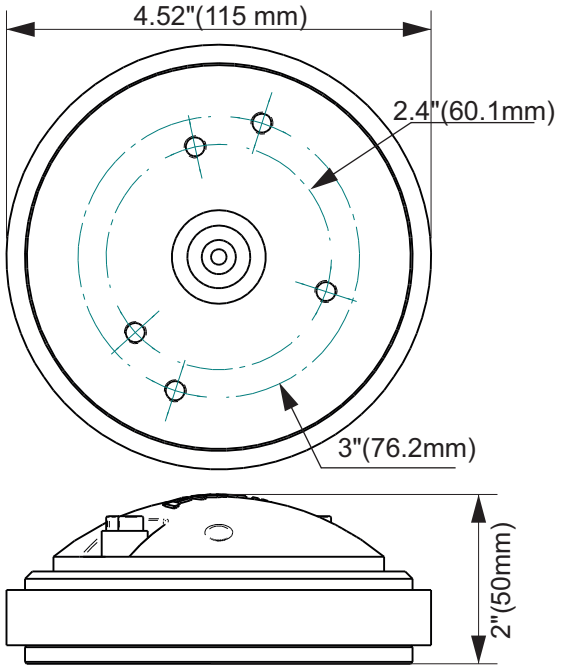

EXTRA INFO

Overal Diameter	4.52” (115 mm)
Overal Depth	2” (50 mm)
Mounting Bolt Circle	M6 x 2 3” (76.2 mm)
	M6 x 3 2.4” (61.1 mm)
Net Weight	3.16 lbs (1.44 kg)
Shipping Weight	3.50 lbs (1.58 kg)
Carton Dimensions W x L x H	5.31” x 5.0” x 3.15” (135 x 127 x 80 mm)

Frequency Response Measured at 2.83v/1m

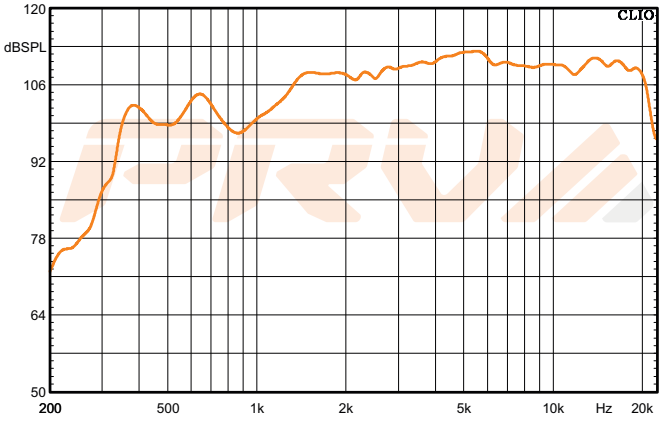

***Frequency Response Measured on WG14-25**

PRV AUDIO USA (USA and Export)
FORT LAUDERDALE, FL
support@prvaudio.com
www.prvaudio.com

PRV AUDIO BRAZIL (Brazilian Sales Only)
SAO LEOPOLDO, RS
vendas@pvaudio.com.br
www.pvaudio.com.br

PRV Audio strives to manufacture the best drivers in the Professional Loudspeaker industry. Specifications are subject to change due to continuous product improvement - Rev: 12/15