

WG2500Ti

Professional Compression Driver





KEY FEATURES

- 2.5" Voice coil and 2" exit
- 100 Watts continuous power handling
- 107 dB Sensitivity
- WG14-50CR Aluminum wave guide



GENERAL SPECIFICATIONS


Exit Throat Diameter	2" (50 mm)
Nominal Impedance	8 Ohms
Rated Power Handling	100 Watts
Program Power	200 Watts
Sensitivity 2.83V at 1m*	107 dB
Recommended High Pass Crossover**	1700 Hz***
for Full Power Handling	*12 db/oct Crossover
Frequency Response at -10dB	1200-17,000Hz
Voice Coil Diameter	2.5" (65 mm)
Voice Coil Wire	Cooper
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	21.1 T
Magnet Material	Ferrite

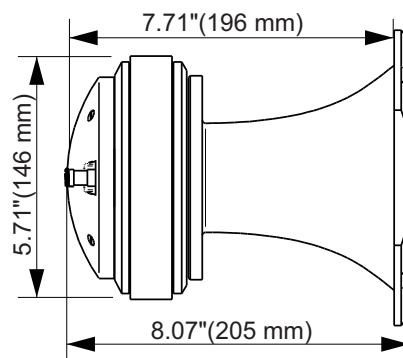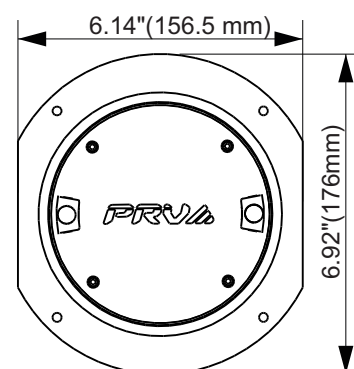

EXTRA INFO

Overall Depth	8.07" (205 mm)
Mounting Depth	7.71" (196 mm)
Overall Width	6.14" (156.5 mm)
Overall Height	6.92" (176 mm)
Baffle Cutout	5.71" (146 mm)
Net Weight	10.32lbs (4.68 kg)
Shipping Weight	11.02lbs (5.00 kg)
Carton Dimensions W x L x H	8.26" x 7.58" x 9.45" (210 x 190 x 240 mm)

Frequency Response Measured at 2.83v/1m

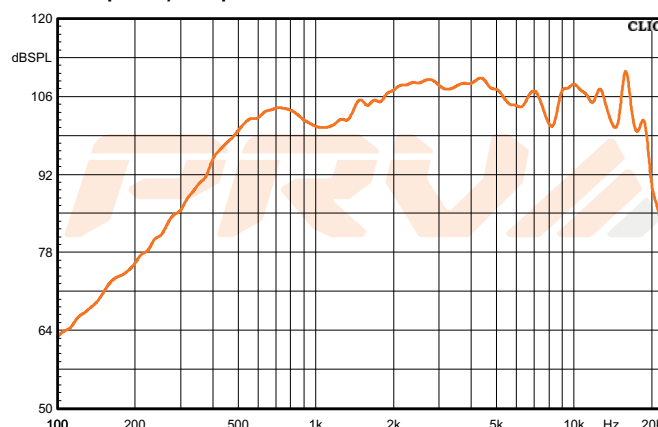

*Frequency Response Measured on WG14-50CR

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
 FORT LAUDERDALE, FL SAO LEOPOLDO, RS
 support@prvaudio.com vendas@pvaudio.com.br
 www.prvaudio.com www.pvaudio.com.br