


Patented Ring Radiator Design

Silk Diaphragm

High Sensitivity

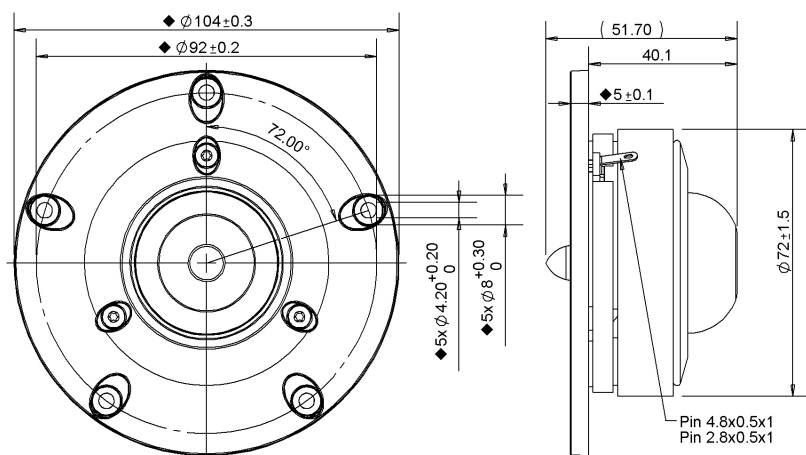


SPECIFICATIONS

Transducer Size		25	mm
Impedance		4	Ω
Frequency Range ¹		800 - 20000	Hz
Sensitivity ² (2.83V 1W @ 1m)		91.9 88.9	dB
Power Rating (IEC 268-5)		15	W
Voice Coil Size		25.8	mm
Air Gap Winding Height	H _{ag} H _{vc}	3 2.2	mm
Net Weight		500	g

PARAMETERS ³

Eff. Piston Area	S_d	8.24	cm ²
DC Resistance	R_e	3.1	Ω
Minimum Impedance	Z_{min}	3.5	Ω
Inductance	L_e	0.009	mH
Resonance Frequency ⁴	F_s	440	Hz
Mechanical Q Factor	Q_{ms}	2.36	-
Electrical Q Factor	Q_{es}	0.539	-
Total Q Factor	Q_{ts}	0.44	-
Moving Mass	M_{ms}	0.295	g
Compliance	C_{ms}	440	$\mu\text{m/N}$
Equivalent Volume	V_{as}	0.043	L
Motor Force Factor	Bl	2.15	Tm
Motor Efficiency	β	1.52	(Bl) ² / R_e
Linear Excursion ⁵	X_{max}	1.13	mm

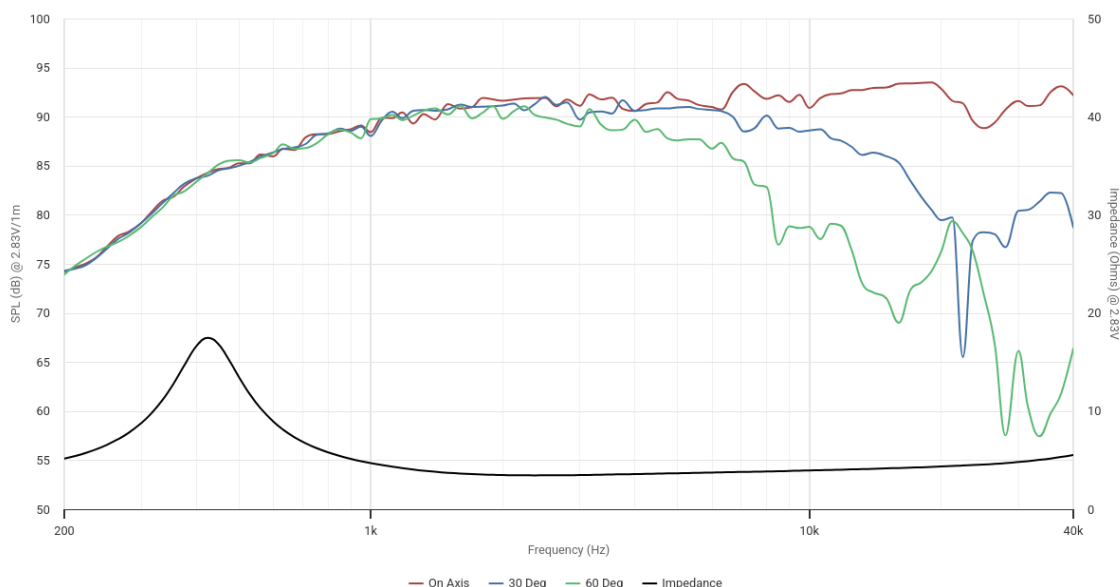

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice.

Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. ¹ Specified by Engineering as linear working range of transducer. ² Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. ³ Measured in Free Air without preconditioning, therefore subject to some deviation. ⁴ Impedance and F_s value measured under different conditions. ⁵ Equal/Overhung: $(H_{vc} - H_{ag})/2 + H_{ag}/3$. Underhung: $(H_{ag} - H_{vc})/2 + H_{vc}/3$. ⁶ Mechanically limited excursion (e.g. bottoming, spider crash).