Peerless

NE123W-08

WOOFER

- Cast Aluminum Frame
- Neodymium Motor
- Paper Diaphragm
- Patented PentaCut Cone Technology
- Rubber Surround

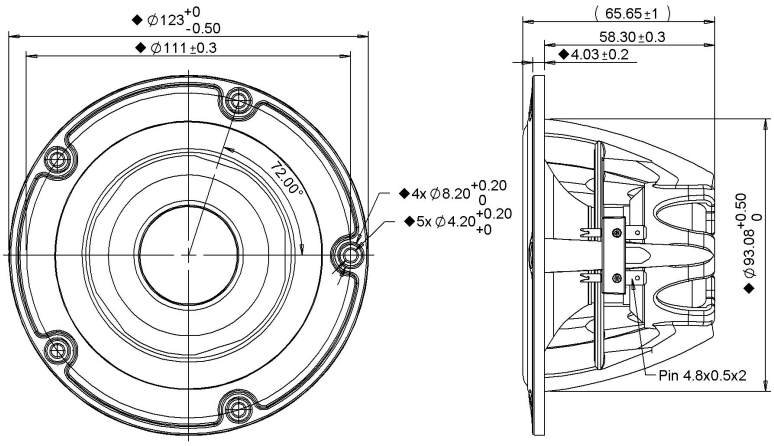

SPECIFICATIONS			
Transducer Size		4	in
Impedance		8	Ω
Frequency Range [1]		100 - 8000	Hz
Sensitivity [2] **(2.83V | 1W @ 1m)**		86.1 | 86.1	dB
Power Rating (IEC 268-5)		45	W
Voice Coil Size		32.4	mm
Air Gap | Winding Height	H_{ag} | H_{vc}	4 | 10.2	mm
Net Weight		0.41	kg
PARAMETERS [3]			
Eff. Piston Area	S_d	54.1	cm^2
DC Resistance	R_e	6.1	Ω
Minimum Impedance	Z_{min}	7	Ω
Inductance	L_e	0.118	mH
Resonance Frequency [4]	F_s	73	Hz
Mechanical Q Factor	Q_{ms}	9.37	-
Electrical Q Factor	Q_{es}	0.487	-
Total Q Factor	Q_{ts}	0.46	-
Moving Mass	M_{ms}	5.91	g
Compliance	C_{ms}	800	µm/N
Equivalent Volume	V_{as}	3.3	L
Motor Force Factor	Bl	5.83	Tm
Motor Efficiency	β	5.6	$(Bl)^2 / R_e$
Linear Excursion [5]	X_{max}	4.43	mm
Max Mechanical Excursion [6]	X_{mech}	10.9	mm

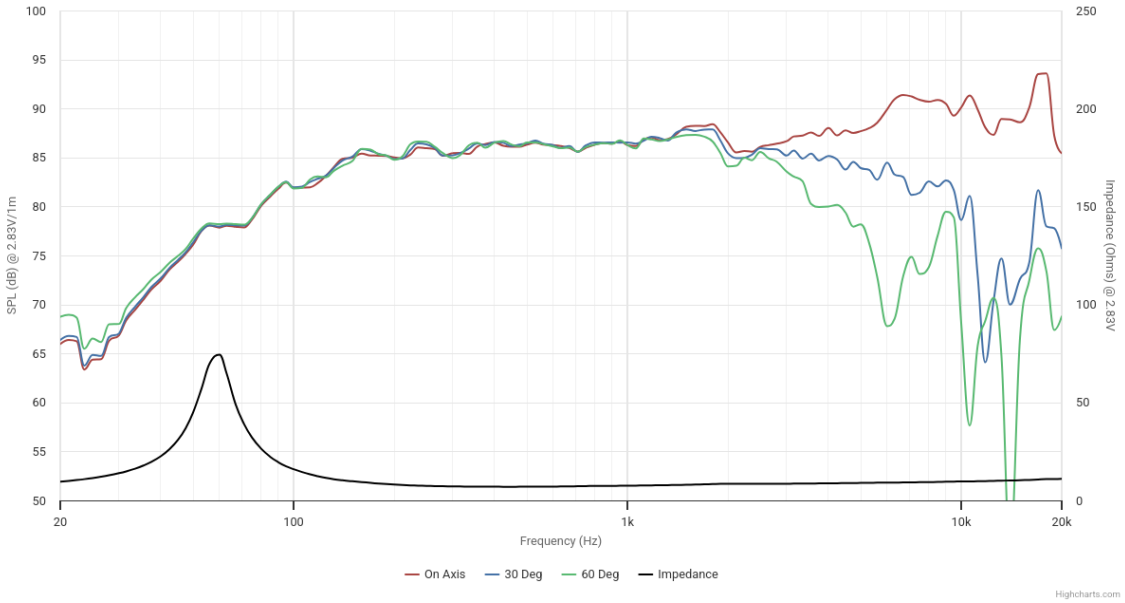

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tymphany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. [1] Specified by Engineering as linear working range of transducer. [2] Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. [3] Measured in Free Air without preconditioning, therefore subject to some deviation. [4] Impedance and Fs value measured under different conditions. [5] Equal/Overhung: $(H_{vc} - H_{ag})/2 + H_{ag}/3$. Underhung: $(H_{ag} - H_{vc})/2 + H_{vc}/3$. [6] Mechanically limited excursion (e.g. bottoming, spider crash).

© Tymphany Enterprises